

Variable-Fidelity Multipoint Aerodynamic Shape Optimization With Output-Based Adapted Meshes

Guodong Chen^{a,*}, Krzysztof J. Fidkowski^a

^a*Department of Aerospace Engineering, University of Michigan, Ann Arbor, MI, 48109*

Abstract

This paper presents a method to control the discretization error in multipoint aerodynamic shape optimization using output-based adapted meshes. The meshes are adapted via adjoint-based error estimates, taking into account both the objective and constraint output errors. A multi-fidelity optimization framework is then developed by taking advantage of the variable fidelity offered by adaptive meshes. The objective functional and its sensitivity at each design point (operating condition) are first evaluated on the same initial coarse mesh, which is then subsequently adapted for each design point individually as the shape optimization proceeds. The effort to set up the optimization is minimal since the initial mesh can be fairly coarse and easy to generate. As the shape approaches the optimal design, the mesh at each design point becomes finer, in regions necessary for that particular operating condition. The multi-fidelity framework is tightly coupled with the objective error estimation to ensure the optimization accuracy at each fidelity. Computational savings arise from a reduction of the mesh size when the design is far from optimal and avoiding an exhaustive search on low-fidelity meshes. The proposed method is demonstrated on multipoint drag minimization problems of a transonic airfoil with lift and area constraints. Improved accuracy and efficiency are shown compared to traditional fixed-fidelity optimization with a fixed computational mesh.

Keywords: Multipoint optimization, Variable-fidelity optimization, Discretization error, Adjoint-based error estimation, Mesh adaptation

1. Introduction

Over the past several decades, Computational Fluid Dynamics (CFD) has become increasingly prevalent in aerospace design and analysis. The fast turnaround time, high degree of geometric flexibility, and almost arbitrary test conditions offered by CFD have made it an attractive tool in the aerodynamic design process. Successful use of CFD in practical design problems requires both accurate simulations for a given configuration and efficient optimization methods to improve design configurations. Gradient-free methods such as genetic algorithms may be made robust for non-smooth or non-convex problems [1], but they are generally not as efficient as gradient-based methods, especially for problems with a large number of design parameters. Specifically, gradient-based algorithms converge to the optimum with fewer evaluations of the objective function and lower cost, even when taking into account the gradient calculations [2]. Moreover, with the introduction of adjoint-based sensitivity analysis [3, 4, 5], gradient-based optimization has been made more cost-effective and has become the predominant approach in aerospace design and optimization tasks [6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17].

Ideally, an aerodynamic design is expected to retain favorable performance over a wide range of operating conditions. Optimization at one specific cruise condition can lead to mediocre performance on the overall mission profile, and/or poor performance at off-design conditions. Therefore, aerodynamic optimization

*Corresponding author

Email address: cgderic@umich.edu (Guodong Chen)

Nomenclature

\mathbf{U}	flow state vector	\mathbf{U}_H	coarse space states
\mathbf{R}	discrete flow residual	\mathbf{U}_h	fine space states
J	optimization objective functional	\mathbf{U}_h^H	states injected from coarse space to fine space
J_m	composite objective in multipoint optimization	δJ	output error estimate
ω_i	objective weight at i^{th} design point	δJ^{adapt}	adapt output error estimate
$J_{m,i}$	weighted objective at i^{th} design point	$\delta \mathbf{J}^{\text{trim}}$	trim output error estimate
\mathbf{R}^{trim}	trim constraints	$\epsilon_{i,e}$	error indicator
\mathbf{J}^{trim}	trim outputs	$\epsilon_{i,e}^{\text{adapt}}$	adapt output error indicator
$\bar{\mathbf{J}}^{\text{trim}}$	target trim outputs	$\epsilon_{i,e}^{\text{trim}}$	trim output error indicator
J^{adapt}	adapt/objective output	DOF	degrees of freedom
J_m^{adapt}	composite adapt output in multipoint optimization	C_i	cost measured by DOF at i^{th} point
$J_{m,i}^{\text{adapt}}$	weighted adapt output at i^{th} design point	r_i	output convergence rate at i^{th} point
\mathcal{L}	Lagrangian function	f_i^δ	desired error ratio at i^{th} point
$\boldsymbol{\lambda}, \boldsymbol{\mu}$	coupled adjoints/Lagrange multipliers	f_i^C	desired cost ratio at i^{th} point
\mathbf{x}_t	trim design variables	c_d	drag coefficient
\mathbf{x}_s	active design variables	c_ℓ, \bar{c}_ℓ	lift coefficient and its target value
$\boldsymbol{\Psi}^{\text{adapt}}$	adapt output adjoint	A	airfoil area
$\boldsymbol{\Psi}^{\text{trim}}$	trim output adjoint	M	Mach number
H, h	coarse and fine spaces/discretizations	Re	Reynolds number

in practice must take into account various flight conditions in both the objective and the constraints [6, 11, 18, 19, 20, 21], making the setup for high-fidelity aerodynamic optimization challenging. In order to achieve high accuracy for every design point, the single mesh used for all points has to be able to capture all of the important flow features over a wide range of operating conditions. The designer, either expert in meshing or not, cannot reliably generate a mesh appropriate for all cruise conditions. This situation can be even worse when the geometry is complex or as the number of design points increases. Also, the resulting mesh may be quite fine, making the computational cost needed for high-fidelity multipoint aerodynamic optimization prohibitive in practice. Alternatively, separate meshes can be carefully generated for each operating condition, but this can be non-trivial and time-consuming as the number of design points increases. Furthermore, even if the initial meshes are well-designed on the original shape, they can be inadequate or redundant as the shape changes during the optimization, e.g. if shape changes cause shocks to move or disappear. On the other hand, numerical errors are typically only investigated via grid convergence studies for the initial and final designs, before and after the optimization, which can potentially lead to inaccurate or spurious optima [22, 23]. These are the problems that we tackle in the present work.

In order to aid practical multipoint aerodynamic design and to reduce the optimization cost, automated adapted meshes are introduced into the design process using gradient-based optimization algorithms. The designer only needs to provide a relatively coarse background mesh to start the optimization run. Then, the computational mesh is adapted individually in necessary regions based on the output error estimates,

with active control of numerical error at various operating conditions. The fact that both the output error estimation and objective sensitivity calculations rely on adjoint solutions makes the incorporation of mesh adaptation into optimization more efficient. After showing many successes in a wide range of aerospace computational applications [24, 25, 26, 27, 28, 29, 30, 31], output-based error estimation and mesh adaptation methods have been demonstrated in several single-point aerodynamic shape optimization problems [32, 33, 34, 35, 36, 23, 37, 38]. However, to the authors’ knowledge, no attention has been paid to more sophisticated multipoint optimization problems.

The present work proposes a variable-fidelity implementation of multipoint aerodynamic optimization, integrating output-based error estimation and mesh adaptation with a gradient-based algorithm to actively control the numerical error during optimization. We adopt the error estimation and mesh adaptation strategy developed in our previous work [23], taking the errors in the constraint outputs into account during error estimation and mesh adaptation, since the errors in the constraints can indirectly affect the calculation of the objectives [39]. Two unstructured mesh adaptation methods are considered in this paper: (a) mesh adaptation with Hessian-based anisotropy, and (b) mesh optimization via error sampling and synthesis (MOESS).

In addition to the time saving on the optimization setup, this method also has the potential to reduce the run-time computational cost of the optimization. As the physics of various operating conditions can differ substantially, the meshes required to accurately predict the outputs also differ. With the proposed method, meshes for the points whose physics are relatively simple (e.g. low speed, laminar flow) can be coarse, whereas substantial mesh refinement can be added to those points governed by more complex physics (e.g. shocks, turbulent flows). Furthermore, the refinement can differ among the complex physics points, e.g. as shocks and wakes move to different positions. A variable-fidelity optimization framework is built into the proposed method, taking advantage of the variable fidelity offered by adaptive meshes. The variable-fidelity framework reduces the computational cost when the shape is far from the optimum, thus avoiding over-refining on an undesired configuration. Conversely, the error estimation prevents optimization directions from being polluted by discretization errors and over-optimization on a coarse mesh. Different levels of *a priori* meshes can also be used to enable variable-fidelity optimizations, though the mesh generation and optimization setup in such a scenario rely more on a user’s experience to take advantage of various fidelity levels.

The remainder of this paper proceeds as follows. We describe the general aerodynamic optimization problem in Section 2 and the discontinuous Galerkin discretization in Section 3. Details of the error estimation and mesh adaptation are given in Section 4 and Section 5. Section 6 presents the coupling of gradient-based optimization with error estimation and mesh adaptation. The primary results are shown in Section 7, and Section 8 concludes the present work and discusses potential future work.

2. Problem Formulation

2.1. Multipoint Aerodynamic Optimization

In general, the aerodynamic shape optimization problem can be stated as a search for the design variables \mathbf{x} over the design space \mathcal{X} that minimize a given objective function J :

$$\begin{aligned} \min_{\mathbf{x}} \quad & J(\mathbf{U}, \mathbf{x}), \quad \mathbf{U} \in \mathcal{U}, \mathbf{x} \in \mathcal{X}, \\ \text{s.t.} \quad & \mathbf{R}^e(\mathbf{U}, \mathbf{x}) = \mathbf{0}, \\ & \mathbf{R}^{ie}(\mathbf{U}, \mathbf{x}) \geq \mathbf{0}, \end{aligned} \tag{1}$$

where $J: \mathcal{U} \times \mathcal{X} \rightarrow \mathbb{R}$ represents a scalar objective function, always defined by aerodynamic outputs, for example lift or drag or a combination of these for multi-objective optimization. $\mathbf{U} \in \mathcal{U} \subset \mathbb{R}^{N_f}$ denotes the flow variable vector of dimension N_f , and $\mathbf{R}^e: \mathcal{U} \times \mathcal{X} \rightarrow \mathbb{R}^{N_e}$ and $\mathbf{R}^{ie}: \mathcal{U} \times \mathcal{X} \rightarrow \mathbb{R}^{N_{ie}}$ are the N_e equality and N_{ie} inequality constraints, respectively. The flow variables \mathbf{U} are solved within a feasible space \mathcal{U} given a design \mathbf{x} to satisfy the flow equations, often the Euler or Navier-Stokes equations. In discretized form, these

can be represented by a set of nonlinear equations,

$$\mathbf{R}(\mathbf{U}, \mathbf{x}) = \mathbf{0}, \quad \mathbf{U} \in \mathcal{U}, \quad \forall \mathbf{x} \in \mathcal{X}, \quad (2)$$

where $\mathbf{R}: \mathcal{U} \times \mathcal{X} \rightarrow \mathbb{R}^{N_f}$ is the nonlinear flow residual vector, which when driven to zero implicitly defines \mathbf{U} as a function of \mathbf{x} .

Consider a multipoint optimization problem involving N_m design points (typically various Mach numbers). To combine the objective outputs, the weighted-sum method is used in this work,

$$J_m = \sum_{i=1}^{N_m} \omega_i J_i(\mathbf{U}_i, \mathbf{x}) = \sum_{i=1}^{N_m} J_{m,i}, \quad (3)$$

where J_m is the scalar composite objective used in the optimization, a sum of the objective component $J_{m,i}$ at each design point. $J_{m,i}$ is defined as the objective at the i^{th} design point $J_i(\mathbf{U}_i, \mathbf{x})$ weighted by ω_i , which is specified by the user or from the quadrature rules. The objective at each point $J_i(\mathbf{U}_i, \mathbf{x})$ depends on the design \mathbf{x} shared by all the design points and the individual flow state solution $\mathbf{U}_i \in \mathbb{R}^{N_{f,i}}$.

2.2. Adjoint and Design Equations

Inactive inequality constraints $\mathbf{R}_a^{\text{ie}}(\mathbf{U}, \mathbf{x})$, do not affect the optimization explicitly, while the active ones $\mathbf{R}_a^{\text{ie}} = \mathbf{0}$ behave as equality constraints. In general, the inequality constraints can also be transformed into equality constraints with non-negative slack variables [40]. For easier illustration, we only consider the active inequality constraints and equality constraints, put together into one vector of dimension N_t as trim constraints, $(\mathbf{R}^{\text{trim}})^T = [(\mathbf{R}^e)^T (\mathbf{R}_a^{\text{ie}})^T] \in \mathbb{R}^{N_t}$,

$$\mathbf{R}^{\text{trim}}(\mathbf{U}, \mathbf{x}) = \mathbf{J}^{\text{trim}}(\mathbf{U}, \mathbf{x}) - \bar{\mathbf{J}}^{\text{trim}} = \mathbf{0}, \quad (4)$$

where $\bar{\mathbf{J}}^{\text{trim}}$ is a set of target trim outputs, for example, the target lift in a lift-constrained problem. In multipoint optimization problems, each operating condition can have the same or different trim constraints. \mathbf{J}^{trim} is a vector concatenated with the trim outputs at different operating conditions $\mathbf{J}_i^{\text{trim}} \in \mathbb{R}^{N_{t,i}}$, $\sum_i^{N_m} N_{t,i} = N_t$. In order to distinguish the trim outputs from the objective output, we denote the latter by $J_m^{\text{adapt}} = \sum_i^{N_m} \omega_i J_i^{\text{adapt}} = \sum_i^{N_m} J_{m,i}^{\text{adapt}}$, as the objective output is often the direct target of adaptation.

The adjoint-based optimization is equivalent to searching for the stationary point of the Lagrangian function, which augments the flow equations with additional constraints,

$$\mathcal{L} = \sum_{i=1}^{N_m} \omega_i J_i^{\text{adapt}}(\mathbf{U}_i, \mathbf{x}) + \sum_{i=1}^{N_m} \lambda_i^T \mathbf{R}_i(\mathbf{U}_i, \mathbf{x}) + \sum_{i=1}^{N_m} \mu_i^T \mathbf{R}_i^{\text{trim}}(\mathbf{U}_i, \mathbf{x}), \quad (5)$$

where $\mathbf{R}_i(\mathbf{U}_i, \mathbf{x})$ are the flow equations at each design point, and $\lambda_i \in \mathbb{R}^{N_{f,i}}$ and $\mu_i \in \mathbb{R}^{N_{t,i}}$ are the Lagrange multipliers associated with the flow equations and the trim constraints, respectively. The first-order optimality conditions are obtained by setting the partial derivatives of \mathcal{L} to zero,

$$\frac{\partial \mathcal{L}}{\partial \mathbf{x}} = \sum_{i=1}^{N_m} \omega_i \frac{\partial J_i^{\text{adapt}}}{\partial \mathbf{x}} + \sum_{i=1}^{N_m} \lambda_i^T \frac{\partial \mathbf{R}_i}{\partial \mathbf{x}} + \sum_{i=1}^{N_m} \mu_i^T \frac{\partial \mathbf{R}_i^{\text{trim}}}{\partial \mathbf{x}} = \mathbf{0}, \quad (6)$$

$$\frac{\partial \mathcal{L}}{\partial \mathbf{U}_i} = \omega_i \frac{\partial J_i^{\text{adapt}}}{\partial \mathbf{U}_i} + \lambda_i^T \frac{\partial \mathbf{R}_i}{\partial \mathbf{U}_i} + \mu_i^T \frac{\partial \mathbf{R}_i^{\text{trim}}}{\partial \mathbf{U}_i} = \mathbf{0}, \quad i = 1, \dots, N_m; \quad (7)$$

$$\frac{\partial \mathcal{L}}{\partial \lambda_i} = \mathbf{R}_i(\mathbf{U}_i, \mathbf{x}) = \mathbf{0}, \quad i = 1, \dots, N_m; \quad (8)$$

$$\frac{\partial \mathcal{L}}{\partial \mu_i} = \mathbf{R}_i^{\text{trim}}(\mathbf{U}_i, \mathbf{x}) = \mathbf{0}, \quad i = 1, \dots, N_m. \quad (9)$$

As we solve the flow equations for a given design \mathbf{x} each time at every design point, Eqn. 8 is always satisfied during the optimization. The trim constraints can be handled by either the optimizer or the flow solver.

The latter approach is used in the present work to restrict the optimization exploration path to be always feasible. A set of design variables is dedicated to satisfying the trim constraints, denoted as trim variables \mathbf{x}_t , $\dim(\mathbf{x}_t) = \dim(\mathbf{J}^{\text{trim}}) = N_t$. Hence Eqn. 9 is satisfied by the variation of the trim variables, so that Eqn. 6 breaks down into,

$$\frac{\partial \mathcal{L}}{\partial \mathbf{x}_s} = \sum_{i=1}^{N_m} \omega_i \frac{\partial J_i^{\text{adapt}}}{\partial \mathbf{x}_s} + \sum_{i=1}^{N_m} \lambda_i^T \frac{\partial \mathbf{R}_i}{\partial \mathbf{x}_s} + \sum_{i=1}^{N_m} \mu_i^T \frac{\partial \mathbf{R}_i^{\text{trim}}}{\partial \mathbf{x}_s} = \mathbf{0}, \quad (10)$$

$$\frac{\partial \mathcal{L}}{\partial \mathbf{x}_t} = \sum_{i=1}^{N_m} \omega_i \frac{\partial J_i^{\text{adapt}}}{\partial \mathbf{x}_t} + \sum_{i=1}^{N_m} \lambda_i^T \frac{\partial \mathbf{R}_i}{\partial \mathbf{x}_t} + \sum_{i=1}^{N_m} \mu_i^T \frac{\partial \mathbf{R}_i^{\text{trim}}}{\partial \mathbf{x}_t} = \mathbf{0}, \quad (11)$$

where \mathbf{x}_s is the set of active design parameters in the optimization. We can now choose λ_i and μ_i at each point such that Eqn. 7 and Eqn. 11 are enforced after each flow solve,

$$\begin{aligned} \lambda_i^T &= - \left(\omega_i \frac{\partial J_i^{\text{adapt}}}{\partial \mathbf{U}_i} + \mu_i^T \frac{\partial \mathbf{R}_i^{\text{trim}}}{\partial \mathbf{U}_i} \right) \left(\frac{\partial \mathbf{R}_i}{\partial \mathbf{U}_i} \right)^{-1} = (\omega_i \Psi_i^{\text{adapt}} + \Psi_i^{\text{trim}} \mu_i^T)^T, \\ \mu^T &= [\mu_1^T, \dots, \mu_{N_m}^T] = - \left(\sum_{i=1}^{N_m} \omega_i \frac{dJ_i^{\text{adapt}}}{d\mathbf{x}_t} \right) \left(\frac{d\mathbf{J}^{\text{trim}}}{d\mathbf{x}_t} \right)^{-1}. \end{aligned} \quad (12)$$

There may exist a set of trim variables which can eliminate the coupling of the trim constraints among different design points (i.e. make $d\mathbf{J}^{\text{trim}}/d\mathbf{x}_t$ diagonal), so that μ_i only depends on the i^{th} design point. In lift-constrained optimization problems, angle of attack is such a choice. Eqn. 12 defines coupled adjoint variables λ_i and μ_i that incorporate the adjoints of both the objective and the trim outputs at each design point, $\Psi_i^{\text{adapt}} \in \mathbb{R}^{N_{f,i} \times 1}$ and $\Psi_i^{\text{trim}} \in \mathbb{R}^{N_{f,i} \times N_{t,i}}$, which satisfy

$$\left[\frac{\partial \mathbf{R}_i}{\partial \mathbf{U}_i} \right]^T \Psi_i^{\text{adapt}} + \left[\frac{\partial J_i^{\text{adapt}}}{\partial \mathbf{U}_i} \right]^T = \mathbf{0}, \quad \left[\frac{\partial \mathbf{R}_i}{\partial \mathbf{U}_i} \right]^T \Psi_i^{\text{trim}} + \left[\frac{\partial \mathbf{J}_i^{\text{trim}}}{\partial \mathbf{U}_i} \right]^T = \mathbf{0}. \quad (13)$$

In Eqn. 12, the $d(\cdot)/d\mathbf{x}_t$ terms are defined as,

$$\begin{aligned} \frac{dJ_i^{\text{adapt}}}{d\mathbf{x}_t} &= \frac{\partial J_i^{\text{adapt}}}{\partial \mathbf{x}_t} + \left(\Psi_i^{\text{adapt}} \right)^T \frac{\partial \mathbf{R}_i}{\partial \mathbf{x}_t}, \\ \frac{d\mathbf{J}^{\text{trim}}}{d\mathbf{x}_t} &= \frac{\partial \mathbf{J}^{\text{trim}}}{\partial \mathbf{x}_t} + \left(\Psi_i^{\text{trim}} \right)^T \frac{\partial \mathbf{R}_i}{\partial \mathbf{x}_t}. \end{aligned} \quad (14)$$

The $d(\cdot)/d(\cdot)$ derivative symbols are used in a sense that the outputs only depend on the trim variables \mathbf{x}_t when the active design parameters \mathbf{x}_s are held constant; i.e., $d(\cdot)/d(\cdot)$ is defined in a sub-problem varying \mathbf{x}_t to satisfy the constraints given a fixed \mathbf{x}_s . For our optimization problem, \mathbf{x}_t depends on \mathbf{x}_s , and total derivatives should only be defined with respect to the active design parameters \mathbf{x}_s . Such derivatives are denoted by $D(\cdot)/D\mathbf{x}_s$ for later use.

With the specific choice of λ_i and μ_i in Eqn. 12, we can evaluate the objective gradients, i.e., the total derivatives in optimization, with respect to the active design variables \mathbf{x}_s via the Lagrangian function,

starting with Eqn. 10,

$$\begin{aligned}
\frac{DJ_m^{\text{adapt}}}{D\mathbf{x}_s} &= \frac{\partial \mathcal{L}}{\partial \mathbf{x}_s} = \sum_{i=1}^{N_m} \omega_i \frac{\partial J_i^{\text{adapt}}}{\partial \mathbf{x}_s} + \sum_{i=1}^{N_m} \lambda_i^T \frac{\partial \mathbf{R}_i}{\partial \mathbf{x}_s} + \sum_{i=1}^{N_m} \mu_i^T \frac{\partial \mathbf{R}_i^{\text{trim}}}{\partial \mathbf{x}_s} \\
&= \sum_{i=1}^{N_m} \omega_i \frac{\partial J_i^{\text{adapt}}}{\partial \mathbf{x}_s} + \sum_{i=1}^{N_m} \omega_i (\Psi_i^{\text{adapt}})^T \frac{\partial \mathbf{R}_i}{\partial \mathbf{x}_s} + \sum_{i=1}^{N_m} \mu_i^T \left[\frac{\partial \mathbf{R}_i^{\text{trim}}}{\partial \mathbf{x}_s} + (\Psi_i^{\text{trim}})^T \frac{\partial \mathbf{R}_i}{\partial \mathbf{x}_s} \right] \\
&= \sum_{i=1}^{N_m} \omega_i \left[\frac{\partial J_i^{\text{adapt}}}{\partial \mathbf{x}_s} + (\Psi_i^{\text{adapt}})^T \frac{\partial \mathbf{R}_i}{\partial \mathbf{x}_s} \right] + \sum_{i=1}^{N_m} \mu_i^T \left[\frac{\partial \mathbf{J}_i^{\text{trim}}}{\partial \mathbf{x}_s} + (\Psi_i^{\text{trim}})^T \frac{\partial \mathbf{R}_i}{\partial \mathbf{x}_s} \right] \quad (15) \\
&= \sum_{i=1}^{N_m} \omega_i \frac{dJ_i^{\text{adapt}}}{d\mathbf{x}_s} + \sum_{i=1}^{N_m} \mu_i^T \frac{d\mathbf{J}_i^{\text{trim}}}{d\mathbf{x}_s} \\
&= \sum_{i=1}^{N_m} \left(\omega_i \frac{dJ_i^{\text{adapt}}}{d\mathbf{x}_s} + \mu_i^T \frac{d\mathbf{J}_i^{\text{trim}}}{d\mathbf{x}_s} \right).
\end{aligned}$$

Similarly to Eqn. 14, $d(\cdot)/d\mathbf{x}_s$ is the sensitivity measured with respect to the active design variables \mathbf{x}_s while keeping the trim variables \mathbf{x}_t fixed.

Now the optimization problem has been reduced to finding an optimal design \mathbf{x}_s that drives to zero the gradients in Eqn. 15. However, in a practical calculation, on a finite-dimensional space, discretization errors appear in both the flow equations and the adjoint equations, so that infinite-dimensional optimality cannot be guaranteed even when the finite-dimensional optimality condition is satisfied. The present work focuses on controlling the error in the optimization problem via error estimation and mesh adaptation.

3. Discretization

Evaluation of the objective function at each optimization step relies on a flow simulation, in this work over an airfoil. The governing equations for the fluid flow are compressible Navier-Stokes,

$$\frac{\partial \mathbf{u}}{\partial t} + \nabla \cdot \vec{\mathbf{F}}(\mathbf{u}) - \nabla \cdot \vec{\mathbf{G}}(\mathbf{u}, \nabla \mathbf{u}) = \mathbf{S}(\mathbf{u}, \nabla \mathbf{u}), \quad (16)$$

where $\mathbf{u} \in \mathbb{R}^s$ is the conservative flow state vector of rank s , $\vec{\mathbf{F}}$ and $\vec{\mathbf{G}}$ denote the inviscid and viscous fluxes, respectively, and \mathbf{S} represents the source term required when modeling turbulence. The viscous flux is assumed to be linear on the state gradients, $\vec{\mathbf{G}}_i(\mathbf{u}, \nabla \mathbf{u}) = \mathbf{K}_{i,j}(\mathbf{u}) \partial_j \mathbf{u}$, where $\mathbf{K}_{i,j}$ denotes the diffusivity tensor. When running Reynolds-averaged turbulent cases, we use the Spalart-Allmaras one-equation model, with a negative turbulent-viscosity modification [41].

We discretize Eqn. 16 with the discontinuous Galerkin (DG) finite-element method, which is suitable for high-order accuracy and hp -refinement [42, 43, 44, 25, 45]. However, the framework proposed in this work can be applied to other discretizations supporting output-based error estimation and mesh adaptation. Consider a partition \mathcal{T}_h of the computational domain Ω consisting of N_e non-overlapping elements Ω_e , $\mathcal{T}_h = \{\Omega_e : \cup \Omega_e = \Omega, \cap \Omega_e = \emptyset\}$. The state is approximated by piece-wise polynomials lying on the approximation space \mathcal{V}_h , with no continuity constraints on the approximation between adjacent elements. Formally, the approximation space is defined as $\mathcal{V}_h = [\mathcal{V}_h]^s$, where $\mathcal{V}_h = \{v \in L^2(\Omega) : v|_{\Omega_e} \in \mathcal{P}^p, \forall \Omega_e \in \mathcal{T}_h\}$, and \mathcal{P}^p denotes polynomials of order p on the reference space of element Ω_e . The weak form of Eqn. 16 follows from multiplying the equation by test functions (taken from the same approximation space), integrating by

parts, and coupling elements via unique inter-element fluxes,

$$\begin{aligned}
& \int_{\Omega_e} \mathbf{w}_h^T \frac{\partial \mathbf{u}}{\partial t} d\Omega - \int_{\Omega_e} \nabla \mathbf{w}_h^T \cdot \left[\vec{\mathbf{F}}(\mathbf{u}_h) - \vec{\mathbf{G}}(\mathbf{u}_h, \nabla \mathbf{u}_h) \right] d\Omega \\
& + \int_{\partial\Omega_e} \mathbf{w}_h^T \left[\widehat{\mathbf{F}}(\mathbf{u}_h^+, \mathbf{u}_h^-) - \widehat{\mathbf{G}}(\mathbf{u}_h^+, \mathbf{u}_h^-, \nabla \mathbf{u}_h^+, \nabla \mathbf{u}_h^-) \right] \cdot \vec{n} dS \\
& - \int_{\partial\Omega_e} (\mathbf{u}_h^+ - \{\mathbf{u}_h\})^T \vec{\mathbf{G}}(\mathbf{u}_h^+, \nabla \mathbf{w}_h^+) \cdot \vec{n} dS = \int_{\Omega_e} \mathbf{w}_h^T \mathbf{S}(\mathbf{u}_h, \nabla \mathbf{u}_h) d\Omega \quad \forall \mathbf{w}_h \in \mathcal{V}_h.
\end{aligned} \tag{17}$$

On the element boundary Ω_e , $(\cdot)^+$, $(\cdot)^-$ denote, respectively, the quantities taken from the element or its neighbor, $\{\cdot\}$ is the face/edge average or the boundary value, and $(\hat{\cdot}) \cdot \vec{n}$ represents the uniquely defined normal numerical flux on element interfaces. We use the Roe approximate Riemann solver [46] for the inviscid flux $\widehat{\mathbf{F}}$, while for the viscous flux $\widehat{\mathbf{G}}$ we use the second form of Bassi and Rebay [47]. The last term on the left-hand side (LHS) of Eqn. 17 symmetrizes the weak form and ensures adjoint consistency.

In this paper, we focus on steady state systems, so that $\frac{\partial \mathbf{u}}{\partial t}$ is omitted for later exposition. Choosing a basis for the test and trial spaces, the DG weak form in Eqn. 17 yields a system of discrete algebraic equations in the form of Eqn. 2,

$$\mathbf{R}_h(\mathbf{U}_h, \mathbf{x}) = \mathbf{0}, \tag{18}$$

where $\mathbf{U}_h \in \mathbb{R}^{N_h}$ is the discrete state vector of basis function coefficients of dimension N_h , and \mathbf{R}_h is the discrete residual vector, a nonlinear function of the state vector \mathbf{U}_h and the design variables \mathbf{x} . The subscript h refers to fidelity of the approximation/test space with respect to the approximation order and mesh refinement.

4. Output Error Estimation

4.1. Adjoint-based Error Estimation

In practice it is generally not possible to obtain the true numerical error for an output, whereas the difference between a coarse space and fine space solution often serves as an acceptable surrogate,

$$\text{output error: } \delta J \equiv J_H(\mathbf{U}_H) - J_h(\mathbf{U}_h). \tag{19}$$

In this expression, J represents the output of interest, and the subscripts h and H denote the fine and coarse spaces, respectively. In the present work, the fine space is achieved by increasing the elements' approximation order p , to $p + 1$. We do not solve the nonlinear fine-space flow problem for the error prediction, but we instead use the linear fine-space adjoint solution, Ψ_h , defined as the sensitivity of the output to the residual (see Eqn. 13). The adjoint weights the residual perturbation to produce an output perturbation [28],

$$\begin{aligned}
\delta J &= J_H(\mathbf{U}_H) - J_h(\mathbf{U}_h) = J_h(\mathbf{U}_h^H) - J_h(\mathbf{U}_h) \\
&\approx -\Psi_h^T [\mathbf{R}_h(\mathbf{U}_h^H) - \mathbf{R}_h(\mathbf{U}_h)] = -\Psi_h^T \mathbf{R}_h(\mathbf{U}_h^H),
\end{aligned} \tag{20}$$

where \mathbf{U}_h is the (hypothetical) exact solution on the fine space, \mathbf{U}_h^H is the state injected into the fine space from the coarse one, which generally will not give a zero fine space residual, $\mathbf{R}_h(\mathbf{U}_h^H) \neq \mathbf{R}_h(\mathbf{U}_h) = \mathbf{0}$. The derivation of Eqn. 20 originates from small perturbation assumption and is valid for outputs whose definition does not change between the coarse and fine spaces, $J_H(\mathbf{U}_H) = J_h(\mathbf{U}_h^H)$.

4.2. Output Error Estimation Under Trim Constraints

Normally, the error estimation is applied only to the output in which we are most interested, i.e., the objective. However, our optimization problem requires simultaneous solutions of flow equations and trim

constraints. The numerical error of the trim outputs may indirectly affect the calculation of the objective. To take this effect into account, coupled adjoints should be used for the error estimates.

Consider a given design \mathbf{x}_s . The error in the objective comes from both the inexact solution \mathbf{U}_H and the inexact trim constraints satisfaction (inexact trim variables $\mathbf{x}_{t,H}$). We can estimate the error in the composite objective using the linearization given by Eqn. 7 and Eqn. 11,

$$\begin{aligned}
\delta J_m^{\text{adapt}} &= \sum_{i=1}^{N_m} \omega_i \left[J_{H,i}^{\text{adapt}}(\mathbf{U}_{H,i}, \mathbf{x}_{t,H}) - J_{h,i}^{\text{adapt}}(\mathbf{U}_{h,i}, \mathbf{x}_{t,h}) \right] \\
&= \sum_{i=1}^{N_m} \omega_i \left[J_{h,i}^{\text{adapt}}(\mathbf{U}_{h,i}^H, \mathbf{x}_{t,H}) - J_{h,i}^{\text{adapt}}(\mathbf{U}_{h,i}, \mathbf{x}_{t,h}) \right] \\
&= \sum_{i=1}^{N_m} \omega_i \left[\frac{\partial J_i^{\text{adapt}}}{\partial \mathbf{U}_i} \delta \mathbf{U}_i + \frac{\partial J_i^{\text{adapt}}}{\partial \mathbf{x}_t} \delta \mathbf{x}_t \right] \\
&= - \sum_{i=1}^{N_m} \left[\boldsymbol{\lambda}_{h,i}^T \delta \mathbf{R}_{h,i} + \boldsymbol{\mu}_{h,i}^T \delta \mathbf{R}_{h,i}^{\text{trim}} \right] \\
&= - \sum_{i=1}^{N_m} \left[\boldsymbol{\lambda}_{h,i}^T \mathbf{R}_{h,i}(\mathbf{U}_{h,i}^H, \mathbf{x}_{t,H}) + \boldsymbol{\mu}_{h,i}^T \mathbf{R}_{h,i}^{\text{trim}}(\mathbf{U}_{h,i}^H, \mathbf{x}_{t,H}) \right].
\end{aligned} \tag{21}$$

For the second term in Eqn. 21, we can expand the trim residual as

$$\begin{aligned}
\mathbf{R}_{h,i}^{\text{trim}}(\mathbf{U}_{h,i}^H, \mathbf{x}_{t,H}) &= \mathbf{J}_{h,i}^{\text{trim}}(\mathbf{U}_{h,i}^H, \mathbf{x}_{t,H}) - \bar{\mathbf{J}}_i^{\text{trim}} \\
&= [\mathbf{J}_{H,i}^{\text{trim}}(\mathbf{U}_{H,i}, \mathbf{x}_{t,H}) - \bar{\mathbf{J}}_i^{\text{trim}}] + [\mathbf{J}_{h,i}^{\text{trim}}(\mathbf{U}_{h,i}^H, \mathbf{x}_{t,H}) - \mathbf{J}_{H,i}^{\text{trim}}(\mathbf{U}_{H,i}, \mathbf{x}_{t,H})].
\end{aligned} \tag{22}$$

The first term above is automatically driven to zero because of the trimming on the coarse space. For the second term, again, if the definition of the trim outputs does not depend on the approximation space, then $\mathbf{J}_{h,i}^{\text{trim}}(\mathbf{U}_{h,i}^H, \mathbf{x}_{t,H}) = \mathbf{J}_{H,i}^{\text{trim}}(\mathbf{U}_{H,i}, \mathbf{x}_{t,H})$. Hence, the second term in Eqn. 21 is often negligible, resulting a simpler form of the error estimate for the composite objective,

$$\begin{aligned}
\delta J_m^{\text{adapt}} &= - \sum_{i=1}^{N_m} \boldsymbol{\lambda}_{h,i}^T \mathbf{R}_{h,i}(\mathbf{U}_{h,i}^H, \mathbf{x}_{t,H}) \\
&= - \sum_{i=1}^{N_m} (\omega_i \boldsymbol{\Psi}_{h,i}^{\text{adapt}} + \boldsymbol{\Psi}_{h,i}^{\text{trim}} \boldsymbol{\mu}_{h,i})^T \mathbf{R}_{h,i}(\mathbf{U}_{h,i}^H, \mathbf{x}_{t,H}) \\
&= \sum_{i=1}^{N_m} \left[-\omega_i (\boldsymbol{\Psi}_{h,i}^{\text{adapt}})^T \mathbf{R}_{h,i}(\mathbf{U}_{h,i}^H, \mathbf{x}_{t,H}) - \boldsymbol{\mu}_{h,i}^T (\boldsymbol{\Psi}_{h,i}^{\text{trim}})^T \mathbf{R}_{h,i}(\mathbf{U}_{h,i}^H, \mathbf{x}_{t,H}) \right] \\
&= \sum_{i=1}^{N_m} (\omega_i \delta J_i^{\text{adapt}} + \boldsymbol{\mu}_{h,i}^T \delta \mathbf{J}_i^{\text{trim}}),
\end{aligned} \tag{23}$$

where $\delta J_i^{\text{adapt}}$ is the objective error and $\delta \mathbf{J}_i^{\text{trim}}$ stands for the trim output error, using standard adjoint-based error estimates (Eqn. 20). The weighting by $\boldsymbol{\mu}_{h,i}$ accounts for the effects of trim output error on the objective calculations.

As the trim constraints are always enforced by the flow solver, Eqn. 22 vanishes for every design point during the optimization. Therefore, Eqn. 23 holds for any point along the search path. In contrast, it is only strictly valid for the optimized designs if the constraints are handled by an optimizer that allows for an infeasible search path [23]. On the other hand, $\boldsymbol{\mu}_{h,i}$ is solved in the flow solver during the enforcement of the trim constraints, while it has to be extracted from the optimizer if the constraints are handled by the optimizer [23].

5. Mesh Adaptation

If we would like to use the same mesh for all of the design points, then Eqn. 23 can be directly used to localize the error to each element, which then serves as the indicator for mesh adaptation. However, this can be inefficient when the flow features change significantly at different operating conditions, e.g., from subsonic to supersonic regimes. To achieve certain accuracy in such cases, the mesh should be adapted in the areas important for all of the design points, and hence unnecessary computational effort is added to each flow solve if using a single mesh.

In the present work, we allow different meshes for different design points. The objective error in Eqn. 23 is first localized to each design point as $\delta J_{m,i}^{\text{adapt}} = \omega_i \delta J_i^{\text{adapt}} + \boldsymbol{\mu}_{h,i}^T \delta \mathbf{J}_i^{\text{trim}}$. Then a common approach for obtaining an error indicator is to take the absolute value of the elemental error contribution. When trim outputs are involved, we do not allow cancellation between objective and trim output error indicators, so that the final error indicator on element e at flight condition i , $\epsilon_{i,e}$, is given by

$$\epsilon_{i,e} = \omega_i |\delta J_{i,e}^{\text{adapt}}| + |\boldsymbol{\mu}_i^T| |\delta \mathbf{J}_{i,e}^{\text{trim}}| = \omega_i \epsilon_{i,e}^{\text{adapt}} + |\boldsymbol{\mu}_i^T| \boldsymbol{\epsilon}_{i,e}^{\text{trim}}, \quad (24)$$

where $\epsilon_{i,e}^{\text{adapt}}$ and $\boldsymbol{\epsilon}_{i,e}^{\text{trim}}$ are the non-negative error indicators for the objective output and the trim outputs, respectively.

At each operating condition, the mesh adaptation can be performed as a refinement process to achieve certain accuracy, or as a modification or optimization process at a given cost to improve the accuracy. We will denote the former approach as error-based adaptation while the latter as cost-based adaptation. Although each adaptation strategy has been well-studied for fixed configurations, adaptation involving multiple operating conditions has seldom been investigated. In our implementation, mesh adaptation for multipoint flow simulations is a two-stage process: the desired error/cost is first allocated to each design point; common adaptation techniques are then applied to each design point. The sections below describe the error/cost allocation strategies and the adaptation methods adopted at individual design points.

5.1. Error/Cost Allocation for Multipoint Mesh Adaptation

In error-based mesh adaptation, a target error tolerance is specified to drive mesh refinement. Thus as a first step, we want to determine the error tolerance at each design point. This high-level error split relies on an error convergence model that dictates how the output errors behave with respect to changes in cost, usually measured by the system degrees of freedom, DOF¹. Here, an *a priori* error-cost model is assumed,

$$|\delta J_{m,i}^{\text{adapt}}| \propto C_i^{-r_i/d}, \quad (25)$$

where C_i is the cost at the i^{th} flight condition, r_i is the corresponding output convergence rate, and d is the spatial dimension. The convergence rate at each design point depends on the approximation order and the smoothness of the problem. We use the ideal super-convergent rate of outputs in an adjoint-consistent setting to prevent too aggressive refinement or coarsening (cost redistribution), though lower convergence rates should be expected for under-resolved meshes.

We follow the idea of equally distributing the error-to-cost ratios [48, 29], *i.e.*, the marginal error reduction per cost increase. This is considered optimal as we can otherwise further reduce the error without adding cost by just reallocating degrees of freedom among different design points. For one adaptive iteration, the change in the error due to cost redistribution is

$$\left| \delta J_{m,i}^{\text{adapt}} \right| = \left| \delta J_{m,i}^{\text{adapt},0} \right| \left(\frac{C_i}{C_i^0} \right)^{-r_i/d}, \quad (26)$$

¹DOF is defined as the number of unknowns per equation (state) in the discretized flow equations. It depends on both the approximation order p (uniform in this work) and the number of mesh elements N_e : $\text{DOF} = N_e \times (p+1) \times (p+2)/2$.

where the superscript 0 indicates values in the unadapted meshes. The marginal error-to-cost ratio at each design point can be obtained by

$$\begin{aligned}
\frac{\partial |\delta J_{m,i}^{\text{adapt}}|}{\partial C_i} &= -\frac{r_i}{d} \left| \delta J_{m,i}^{\text{adapt},0} \right| \left(\frac{C_i}{C_i^0} \right)^{-r_i/d-1} \frac{1}{C_i^0} \\
&= -\frac{r_i}{d} \left| \delta J_{m,i}^{\text{adapt},0} \right| \left(\frac{C_i}{C_i^0} \right)^{-r_i/d} \frac{1}{C_i} \\
&= -\frac{r_i}{d} \frac{|\delta J_{m,i}^{\text{adapt}}|}{C_i}, \quad i = 1, \dots, N_m.
\end{aligned} \tag{27}$$

Further, we define the desired error ratios f_i^δ and cost ratios f_i^C as

$$f_i^\delta = \frac{\delta J_{m,i}^{\text{adapt}}}{\delta J_{m,1}^{\text{adapt}}}, \quad f_i^C = \frac{C_i}{C_1}, \quad i = 1, \dots, N_m. \tag{28}$$

By equidistributing the error-to-cost ratios among different design points, the desired error ratios f_i^δ and cost ratios f_i^C can be determined using Eqn. 27. In this work, we further assume identical convergence rates ($r_i = r, i = 1, 2, \dots, N_m$) if the same approximation order is used and the meshes are well-adapted. Eqn. 27 then implies that the desired error ratios and cost ratios are equal, and can be solved as

$$f_i^\delta = f_i^C = \left| \frac{\delta J_{m,i}^{\text{adapt},0}}{\delta J_{m,1}^{\text{adapt},0}} \right|^{\frac{1}{r/d+1}} \left[\frac{C_i^0}{C_1^0} \right]^{\frac{r/d}{r/d+1}}, \quad i = 1, 2, \dots, N_m. \tag{29}$$

The desired ratios in Eqn. 29 can then guide the error redistribution in error-based multipoint mesh adaptation, or cost redistribution in cost-based adaptation. Ideally, specifying desired cost ratios and error ratios are equivalent if the *a priori* error-cost model in Eqn. 25 is perfect, which is not the case in general. Furthermore, an error-based mesh adaptation procedure in practice does not focus on matching exactly the target error, since the *a posteriori* output error may deviate from the *a priori* estimation. Instead, an error tolerance τ_i is specified in the error-based adaptation, and the adaptation (refinement) reduces the *a posteriori* error until it is below the error tolerance, $|\delta J_{m,i}^{\text{adapt}}| \leq \tau_i$. On the other hand, the desired cost can be specified in cost-based adaptation such that the adaptation redistributes the degrees of freedom on the computational mesh to reduce the error while keeping the cost fixed. Therefore, cost-based and error-based adaptation with equal desired ratios result in different meshes even if the same adaptation method is used.

- For cost-based multipoint mesh adaptation, given a fixed total cost C , the desired cost at each design point is then redistributed as,

$$C_i = \frac{f_i^C}{\sum_{j=1}^{N_m} f_j^C} C. \tag{30}$$

At each design point, the mesh adaptation then refines areas more important for output prediction and coarsens elsewhere to keep the cost fixed (within some tolerance).

- In error-based multipoint mesh adaptation, given a total error tolerance τ of the composite objective J_m^{adapt} , we first distribute the tolerance to each design point according to the desired error ratios,

$$\tau_i = \frac{f_i^\delta}{\sum_{j=1}^{N_m} f_j^\delta} \tau. \tag{31}$$

At each design point, the mesh is refined until the objective error component is below the error tolerance, $|\delta J_{m,i}^{\text{adapt}}| \leq \tau_i$. Thus the cost at each design point C_i increases as the mesh is adapted, although the local adaptation may support coarsening.

5.2. Mesh Adaptation at Individual Design Points

At each design point, the mesh is adapted with either cost-based or error-based strategies. During the mesh adaptation, the error indicators in Eqn. 24 provide information of local refinement or coarsening. Meanwhile, the mesh elements should be properly stretched to effectively capture strong directional features. This mesh anisotropy information can come from heuristics, or from a sampling approach. The corresponding adaptation methods considered here are: (a) mesh adaptation with Hessian-based anisotropy detection, and (b) mesh optimization via error sampling and synthesis (MOESS). Both methods rely on metric-based global remeshing, in which the mesh information, including the desired element sizes and stretching directions, is encoded in a continuous Riemannian metric field. The desired metric field is determined by the elemental error indicator given in Eqn. 24, together with the local anisotropy information.

In Hessian-based adaptation, the element sizes are adapted to equidistribute the objective output error while the element shapes are stretched to match the local solution Hessian field such that the directional interpolation errors are equidistributed. The Mach number Hessian is used in this work as it has been found to be generally effective. In MOESS, the mesh adaptation is formulated as an optimization problem in which the optimal change of the metric field is iteratively determined based on a prescribed metric-cost model and a sampling-inferred metric-error relationship. This method is first developed by Yano and Darmofal [48, 49], and a slightly modified version [50] is used in this work. Mesh adaptation at individual design points can be: error-based or cost-based with Hessian-based anisotropy or MOESS sampling-inferred anisotropy. However, MOESS often involves an iterative optimization process with fixed cost, making it inefficient in an error-based setting, thus error-based MOESS is not considered here.

6. Optimization Approach

6.1. Objective and Constraints

For demonstration, two-dimensional airfoil shape optimizations are considered in this work. In particular, the problem considered here is to search for an optimal design (including the airfoil shape and the angles of attack) to minimize the overall drag under a range of flight conditions, subject to fixed lift coefficients and a minimum airfoil area. The optimization objective is the weighted sum of the drag coefficients at different design points, and the corresponding constraints are

$$\begin{aligned} R_i^e(\mathbf{U}_i, \mathbf{x}) &= c_{\ell,i} - \bar{c}_{\ell,i} = 0, & i = 1, \dots, N_m; \\ R^{\text{ie}}(\mathbf{x}) &= A(\mathbf{x}) - A_{\min} \geq 0. \end{aligned} \quad (32)$$

A and A_{\min} represent the current and minimum areas of the airfoil, and $c_{\ell,i}$ and $\bar{c}_{\ell,i}$ denote the current and the target lift coefficients at each design point.

The lift constraints are treated as the trimming constraints, and the angle of attack at each design point α_i is chosen as the trim variable, $\mathbf{x}_t = [\alpha_1, \alpha_2, \dots, \alpha_{N_m}]$, to decouple the trim conditions at various points. During each flow solve, the trim constraints are enforced by a trimming process, which involves a Newton-Raphson iteration of the angles of attack and is presented with details in Appendix A. The inequality area constraint, independent of the flow states, is assumed to be measured exactly and handled by the optimizer.

6.2. Airfoil Parameterization and Mesh Deformation

The airfoil shape is parameterized using the Hicks-Henne basis functions [51], taking a baseline airfoil and creating a new airfoil shape by adding a linear combination of ‘‘bump’’ functions to its upper and lower surfaces,

$$z(x) = z_{\text{base}}(x) + \sum_{i=1}^{N_s} a_i \phi_i(x). \quad (33)$$

x denotes in this case the position along the airfoil chord, and z is the vertical coordinates of the upper or lower airfoil surfaces, considered separately. ϕ_i are the basis functions taken from an optimized basis set [52],

Table 1: Multipoint aerodynamic shape optimization problem

	Function/Variable	Description	Quantity
Minimize	$\sum_{i=1}^{N_m} \omega_i c_{d,i}$	Weighted drag coefficients sum	1
With respect to	\mathbf{x}_s	Hicks-Henne basis function coefficients	N_s
	\mathbf{x}_t	Angles of attack	N_m
Subject to	$c_{\ell,i} - \bar{c}_{\ell,i} = 0$	Lift constraints	N_m
	$A - A_{\min} \geq 0$	Area constraint	1

whose coefficients a_i are the active design variables for the optimization problem, $\mathbf{x}_s = [a_1, a_2, \dots, a_{N_s}] \in \mathbb{R}^{N_s}$. Table 1 summarizes the multipoint aerodynamic optimization problem considered in this work.

At each optimization iteration, the objective function needs to be re-evaluated, which requires a flow solve on the updated geometry, and hence a new mesh must be obtained each time. Rather than regenerating meshes every time, the airfoil boundary deformation is propagated to the interior mesh with an explicit inverse-distance interpolation algorithm [53].

6.3. Optimization Algorithm

Sequential Least Squares Programming (SLSQP) [54] with quasi-Newton type Hessian approximation is used in this work. The gradient of the objective function is calculated by the adjoint method, per Eqn. 15, and the objective and constraints are evaluated with the numerical solution of Eqn. 16 based on the DG discretization given in Section 3. The nonlinear discretized flow equations are solved using a Newton-Raphson procedure, with an element-line preconditioned linear solver [55] applied in every Newton iteration. The flow solver has been validated against many two and three dimensional cases in various flow regimes [56, 57, 58, 59]. Although the optimization problem is formulated in an augmented Lagrangian form in Section 2, any gradient-based constrained optimization algorithm can be used since the Lagrange multipliers associated with the trimming constraints are obtained during the trimming process for mesh adaptation. If the trimming constraints are handled by the optimizer, augmented Lagrangian methods have to be used in order to provide the corresponding Lagrange multipliers for adaptation purposes [23].

Instead of optimizing on a mesh with fixed resolution, which would always require the highest fidelity for accurate calculations, the mesh is progressively refined as the optimization proceeds, resulting in a variable-fidelity optimization. Rather than performing optimization and mesh adaptation sequentially, one after another, an interactive framework is introduced. Two possible ways to incorporate the mesh adaptation and design optimization are considered here: optimization-driven adaptation and adaptation-driven optimization. In the former approach, the optimization tolerance at each fidelity is prescribed by the user. Starting with a loose optimization tolerance, the total maximum allowable error, set to be equal to the optimization tolerance, is first divided into each design point by Eqn. 31. The objective function at each design point is then evaluated on the same coarse initial mesh, and the error estimation and mesh adaptation are performed individually to control the numerical error to be below the error tolerance at the current fidelity. The allowable numerical error tolerance decreases as the optimization fidelity increases. For the latter approach, several mesh levels (degrees of freedom) are defined before the optimization. Starting with a low total cost, the degrees of freedom are redistributed according to Eqn. 30. Then the mesh is modified in Hessian-based adaptation or optimized in MOESS at each design point to improve the accuracy. Once the objective improvement is smaller than the objective error estimate, the optimization terminates at the current cost level and the fidelity increases through mesh adaptation with a higher cost. We refer to these methods as error-based optimization or cost-based optimization, depending on the information specified. The error-based optimization needs an error-based mesh adaptation method: here we use error-based Hessian adaptation; while the cost-based one requires cost-based adaptation mechanics, which can be either cost-based Hessian adaptation or MOESS.

Compared to a more traditional optimization methodology with an *a priori* mesh, unnecessarily fine meshes at the early stages of shape optimization are avoided in the proposed variable-fidelity framework. The problem setup time is significantly reduced with easier mesh generation. Moreover, the elements that

introduce most of the error may differ significantly for different shape configurations during the optimization. Both approaches reduce the chance of over-refining elements that are not relatively important for the final design, which is necessary if the adaptation mechanics do not allow for coarsening. On the other hand, the coupling between error tolerance and optimization tolerance at each fidelity actively controls the optimization at each step to avoid unnecessary convergence at low fidelity. Finally, the new framework can effectively prevent over-refining on an unintended shape, or over-optimizing on a coarse mesh.

The proposed optimization frameworks with error estimation and mesh adaptation are summarized in Algorithm 1 and Algorithm 2, using error-based and cost-based approaches, respectively. Optimization tolerance levels and cost levels are specified by the user, driving the mesh adaptation to actively control the numerical errors. It is in general easier to select optimization tolerance levels as they are directly related to the optimizer setup. However, it can be less practical than specifying the optimization cost levels. In practice, it's usually easier to specify the costs, i.e., mesh sizes, in an optimization problem, such that the total computational cost can be roughly estimated. In particular, some low error levels for very complex simulations may be intractable with reasonable mesh sizes, making the error-based approach less robust than the cost-based approach. In this paper, we assume that the error estimation is sufficiently accurate to represent the “true” numerical error, which may be inappropriate when the adjoint is not well-resolved or when the problem is highly nonlinear. In practice, a safety factor η can be used to ensure the numerical error to always be below the optimization tolerance; $\eta = 1$ is adopted in this paper.

Algorithm 1: Optimization with error estimation and mesh adaptation (error-based)

input : initial design \mathbf{x}_0 , initial coarse mesh \mathcal{T}_h , optimization tolerance levels $\mathcal{O}_1, \mathcal{O}_2, \dots, \mathcal{O}_n$, safety factor $\eta \leq 1$

output: adapted meshes at each design point $\mathcal{T}_{h,i}$
 optimized design \mathbf{x}^* with controlled objective error $\delta J_{m,h}^{\text{adapt}} \leq \mathcal{O}_n$

```

1 for  $l = 1, 2, \dots, n$  do
2   set the total error tolerance as  $\tau_l = \eta \mathcal{O}_l$ 
3   while not converged do ▷ optimization algorithm
4     distribute the total error tolerance  $\tau_l$  at each design point as  $\tau_{l,i}$ , using Eqn. 31
5     for  $i = 1, \dots, N_m$  do
6       while  $\delta J_{m,i}^{\text{adapt}} > \tau_{l,i}$  do
7         adapt the mesh  $\mathcal{T}_{h,i}$  with refinements ▷ Hessian adaptation
8         update  $\mathbf{x}_{t,l}$  to meet trim constraints ▷ trimming process
9         compute the objective component  $J_{m,i}^{\text{adapt}}$  and its error estimate  $\delta J_{m,i}^{\text{adapt}}$ 
10      end
11     end
12     update the composite objective  $J_m^{\text{adapt}} = \sum_{i=1}^{N_m} J_{m,i}^{\text{adapt}}$ 
13     calculate the composite objective gradient  $dJ_m^{\text{adapt}}/d\mathbf{x}_{s,l}$ , per Eqn. 15
14     update the active design  $\mathbf{x}_{s,l}$  with meshes  $\mathcal{T}_{h,i}$  fixed ▷ line search
15   end
16   finish optimization at level  $l$ ,  $\mathbf{x}_{l+1} = \mathbf{x}_l$ 
17 end

```

Algorithm 2: Optimization with error estimation and mesh adaptation (cost-based)

input : initial design \mathbf{x}_0 , initial coarse mesh \mathcal{T}_h , cost levels C_1, C_2, \dots, C_n , safety factor $\eta \geq 1$
output: optimized mesh at each design point $\mathcal{T}_{h,i}$ with total cost C_n
 optimized design \mathbf{x}^* with optimized accuracy at given total cost C_n

```
1 for  $l = 1, 2, \dots, n$  do
2   distribute the total cost  $C_l$  among various design points as  $C_{l,i}$ , using Eqn. 30
3   while not converged do                                     ▷ optimization algorithm
4     for  $i = 1, \dots, N_m$  do
5       for  $j = 1, \dots, N_{adapt}$  do
6         adapt the mesh  $\mathcal{T}_{h,i}$  with DOF redistribution           ▷ Hessian adaptation/MOESS
7         update  $\mathbf{x}_{t,l}$  to meet the trim constraints                 ▷ trimming process
8         compute the objective component  $J_{m,i}^{adapt}$  and its error estimate  $\delta J_{m,i}^{adapt}$ 
9       end
10    end
11    update the composite objective  $J_m^{adapt} = \sum_{i=1}^{N_m} J_{m,i}^{adapt}$ 
12    calculate the composite objective gradient  $dJ_m^{adapt}/d\mathbf{x}_{s,l}$ , per Eqn. 15
13    set the optimization tolerance  $\mathcal{O}_l = \eta \sum_{i=1}^{N_m} \delta J_{m,i}^{adapt}$ 
14    update the active design  $\mathbf{x}_{s,l}$  with meshes  $\mathcal{T}_{h,i}$  fixed           ▷ line search
15  end
16  finish optimization at level  $l$ ,  $\mathbf{x}_{l+1} = \mathbf{x}_l$ 
17 end
```

7. Results



As a simple demonstration of the proposed optimization frameworks, we consider two-dimensional airfoil optimization problems in transonic flow regimes, over a range of flight conditions. The goal of the optimization is to search for an optimal airfoil shape and angles of attack to minimize the drag coefficients, subject to fixed lift trim conditions and a minimum area constraint. We only consider the discretization errors in drag and lift calculations, and the airfoil area measurements are assumed to be exact. Furthermore, the trim constraint tolerances are always set to be sufficiently small to make sure the sensitivity calculation in Eqn. 15 is accurate. The airfoil shape is parameterized with 16 Hicks-Henne basis functions, and the design parameter vector includes both the shape parameters and the angle of attack at each design point. The shape parameters are the active design variables in the optimization, while the angles of attack are used as trim variables to enforce the trim constraints, as described in Section 6.1. Unstructured triangular meshes and DG $p = 2$ approximation are used for the discretization. The airfoil boundary is represented by cubic curved mesh elements. We first test our proposed methods on a two-point, inviscid airfoil optimization problem, following which a more practical turbulent case including three flight conditions is considered. A detailed description of the two cases are given in Table 2.

7.1. Multipoint Inviscid Transonic Airfoil Optimization

In this test case, the two-point optimization starts with a Royal Aircraft Establishment (RAE) 2822 airfoil and seeks an optimal shape and angles of attack to minimize the weighted drag coefficient, subject to fixed lift constraints and nondecreasing airfoil area. The two operating conditions including the corresponding lift trim constraints are listed in Table 2.

Under the high lift trim condition, flow around the original RAE 2822 airfoil features a strong shock on the upper surface, the location and strength of which vary depending on the operating conditions, *i.e.*, Mach number in this case. Without any *a priori* knowledge about the flow fields around the airfoil at each design point, a fairly fine mesh with specific refinement around the airfoil is generally used in optimization. Effort can be put into generating meshes suitable for capturing the shocks effectively, either based on experience


Table 2: Operating conditions for multipoint optimization problems

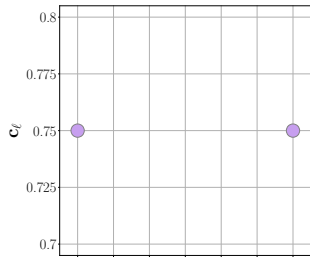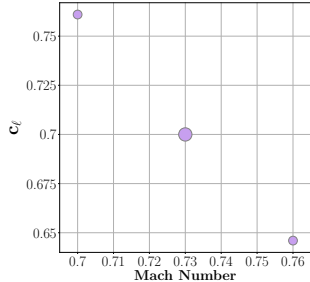Case	Point	Weights w_i	Mach	c_ℓ	Reynolds number	$M - c_\ell$ plot
7.1	1	0.50	0.70	0.750	–	
	2	0.50	0.76	0.750	–	
7.2	1	0.25	0.70	0.761	4.79×10^6	
	2	0.50	0.73	0.700	5.00×10^6	
	3	0.25	0.76	0.646	5.21×10^6	


or output-based error estimates. However, this only helps the analysis on the original shape. If the shock moves or its strength reduces as the optimization proceeds, the specific resolution for the initial design is wasted. Particularly, we expect in this case for the shape to be modified such that the shock strength is significantly weakened. Any substantial refinement on the initial shock location will thus not effectively increase the accuracy but instead add considerable computational cost to the optimization.

We test both the error-based and cost-based optimization frameworks as described in Algorithm 1 and Algorithm 2, with various adaptation methods. For error-based optimization, we use error-based Hessian adaptation; while for the cost-based optimization, both MOESS and cost-based Hessian adaptation are used. All these three optimizations start with the same initial mesh consisting of 393 triangular elements, as shown in Figure 1(a). In the error-based optimization, a set of optimization tolerance levels is specified with an ultimate tolerance of 0.02 drag counts, *i.e.*, 2×10^{-6} . On the other hand, the cost-based optimization starts with a fairly low cost level, and degrees of freedom are added once the optimization converges at current cost level, until the final optimization tolerance is below 0.02 drag counts. To compare with traditional methods, we also run fixed-fidelity optimization on two fixed meshes. The coarse one has comparable DOF as the finest mesh used in the variable-fidelity optimization while the fine one has double the cost. Both of them are generated with specific refinements around the airfoil leading and trailing edges as suggested by the adaptive meshes, while still keeping enough resolution around the airfoil boundary. The optimization tolerances are also set to be 0.02 drag counts. The meshes used in these different optimizations are summarized in Figure 1(b)–1(h). Only the coarse mesh used in the fixed-fidelity optimization is shown for conciseness, as the finer one has more elements but similar uniform refinement around the airfoil boundary.


The objective convergence and mesh evolution are shown in Figure 2. In Figure 2(a), we plot the objectives versus the aggregated total degrees of freedom, which are only accumulated at each optimization major iteration, *i.e.*, not including the line search. We see in the plot that the estimated discretization error of the objective is always above the optimization tolerance in the fixed-fidelity (fixed-mesh) optimization. On the coarse fixed mesh, the discretization error is large and sometimes even comparable to the objective values. Although the objective error decreases as the finer fixed mesh is used, it is still fairly large compared to the optimization tolerance. In these scenarios, the optimizer may work on the numerical error instead of the physics to minimize the drag, leading to inaccurate designs. On the other hand, discretization error is always controlled to be below the optimization tolerance, or the optimization tolerance is adjusted to be

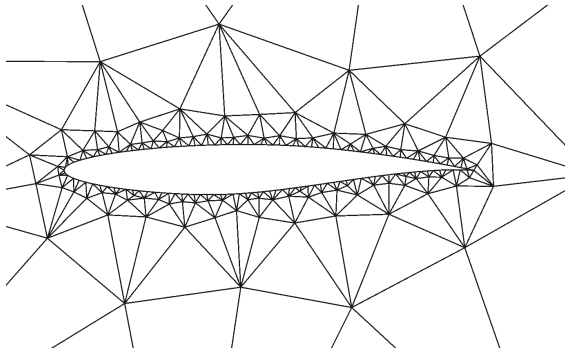


(a) Initial mesh for variable-fidelity optimization

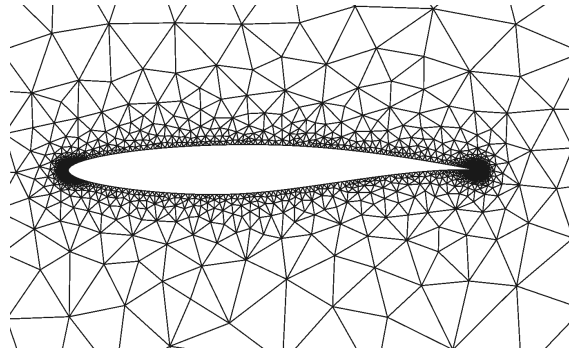


(b) The coarse mesh for fixed-fidelity optimization

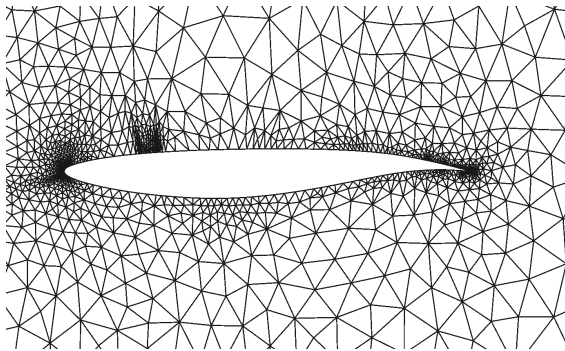


(c) Final mesh at $M = 0.70$ (error-based Hessian adaptation)

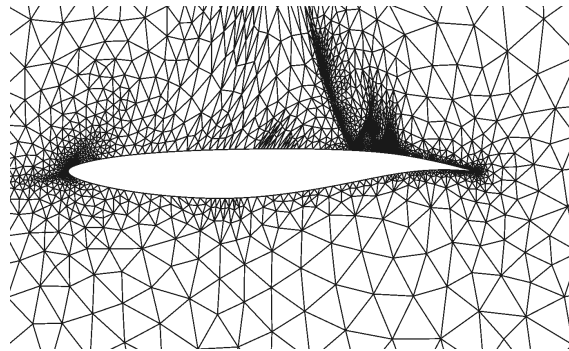


(d) Final mesh at $M = 0.76$ (error-based Hessian adaptation)

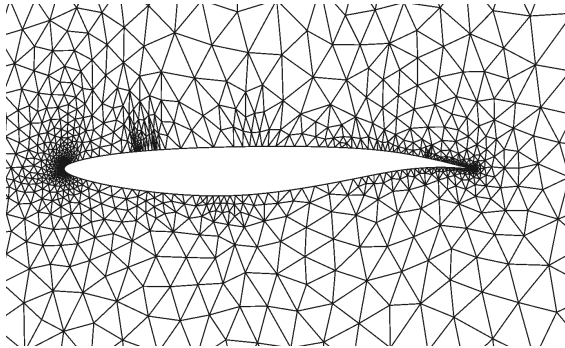


(e) Final mesh at $M = 0.70$ (cost-based Hessian adaptation)

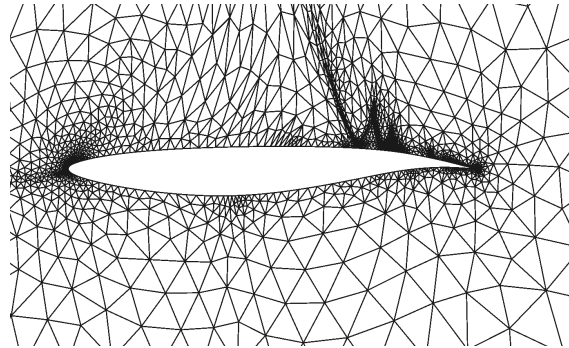

(f) Final mesh at $M = 0.76$ (cost-based Hessian adaptation)

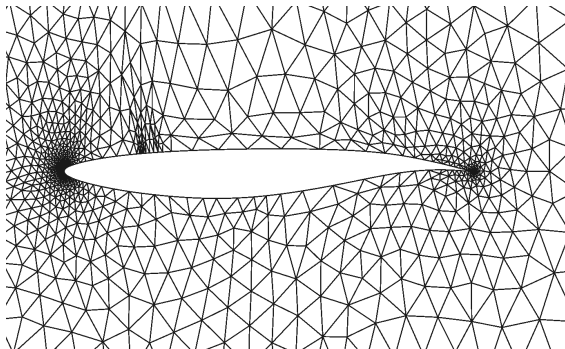

(g) Final mesh at $M = 0.70$ (MOESS)

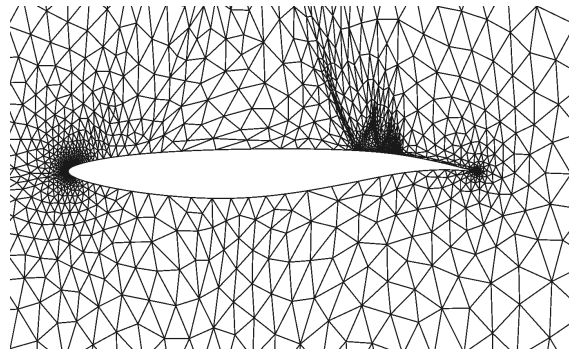

(h) Final mesh at $M = 0.76$ (MOESS)

equal to the discretization error in the proposed methods. Furthermore, the variable-fidelity optimizations with different adaptation methods all converge faster at the highest fidelity by virtue of a better starting point obtained from the lower fidelity. Significant computational resources can be saved with fast, low-fidelity optimizations.

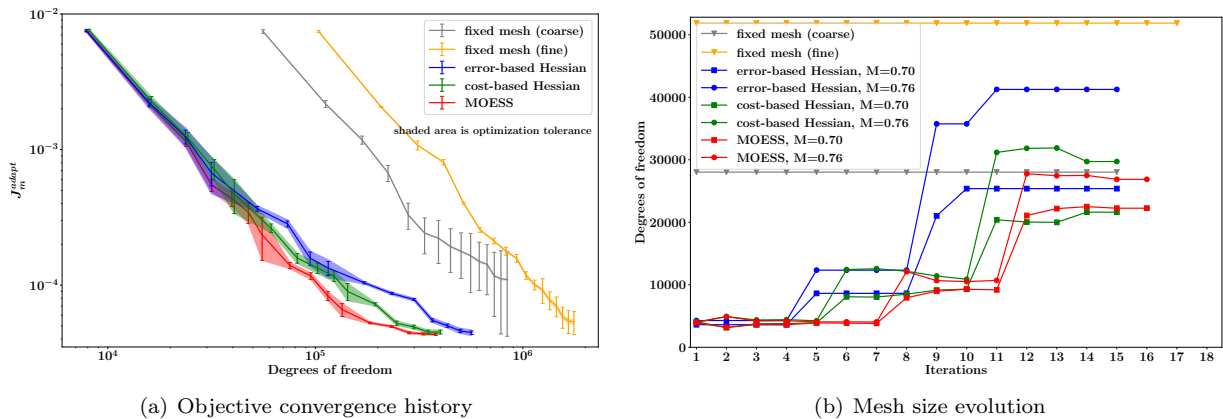


Figure 2: Convergence history and mesh size evolution for different methods (inviscid, transonic)

We can also observe from the mesh evolution plot in Figure 2(b) that the mesh sizes, if adapted, required to achieve similar accuracy on different operating conditions are different. For all the mesh adaptation methods considered, the final mesh size for Mach number of 0.70 is smaller than the one required for Mach number 0.76. Mesh adaptation prevents unnecessarily fine meshes from being used for relatively simple operating conditions. The distinction among these methods comes from the difference between error-based and cost-based approaches, and the difference between Hessian adaptation and MOESS. The error-based approach refines the mesh every time the error is above the optimization tolerance, keeping it fixed otherwise, and hence it tends to over-refine areas that are important for some intermediate designs but not necessary for the final design. On the other hand, the cost-based approach always adapts the mesh while keeps the cost fixed at the same fidelity, so that the redistribution of the degrees of freedom avoids over-refinement and improves the accuracy. If we look at the error-based Hessian adaptation and the cost-based Hessian adaptation (blue and green lines) in Figure 2, they have very similar convergence and costs at low fidelities. However at the highest fidelity, the error-based approach has more refinements, which are added for some intermediate designs. Those extra refinements do not affect the final accuracy much as we can see both methods have similar final accuracy. This suggests using the cost-based optimization framework with cost-based adaptation methods. Although it requires several adaptive iterations with fixed DOF at each major optimization iteration, it prevents extremely fine meshes from being used at the highest fidelity, which is always the main overhead in the optimization. In terms of adaptation methods, both using cost-based approach, MOESS benefits from more appropriate anisotropy detection, resulting in lower cost and better accuracy. As we can see in Figure 1(f) and Figure 1(h), MOESS meshes tend to have more anisotropic elements in the post shock locations, though they have similar refinement at the shocks. If we look at the upstream region of these two meshes, as shown in Figure 3, the difference is more evident: Hessian adaptation only has isotropic refinement along the stagnation streamline since it is important for the output prediction but the Mach number field is isotropic across it; However, MOESS is able to detect the anisotropy through sampling and puts anisotropic resolution along the stagnation streamline. This refinement also indicates the trim output effects on the adaptation, as this anisotropy is more important for the lift calculation, *i.e.*, the trim output, while not very relevant to the prediction of the objective, *i.e.*, the drag. Therefore, we can see in Figure 2 that at the low fidelities, with similar cost, MOESS achieves lower objective error, hence better convergence and better design at the low fidelities. With a better starting design, the optimization at the highest fidelity has smoother convergence, as the sharp objective change at the highest fidelity that occurs in both error-based and cost-based Hessian adaptation is not observed in

MOESS. Since the flow solve in the optimization always restarts from the solution on the previous design, MOESS converges faster and consumes less CPU time compared to cost-based Hessian adaptation due to smaller design changes, even though the aggregated total degrees of freedom are close. The computational cost saving is reflected in Table 3. Computational time results are obtained using parallel runs with 8 processors on the same machine (Intel Core i7-3770 3.40 GHz CPU with 16GB total RAM). The proposed variable-fidelity optimization frameworks with adapted meshes achieve substantial time savings compared to fixed-fidelity optimization with fixed meshes. As mentioned, the cost-based algorithm outperforms the error-based one with considerable time savings on the highest fidelity; cost-based optimization with MOESS achieves the most time savings, around 2 times and 7 times speedup compared to the optimizations on the coarse and fine fixed meshes, respectively.

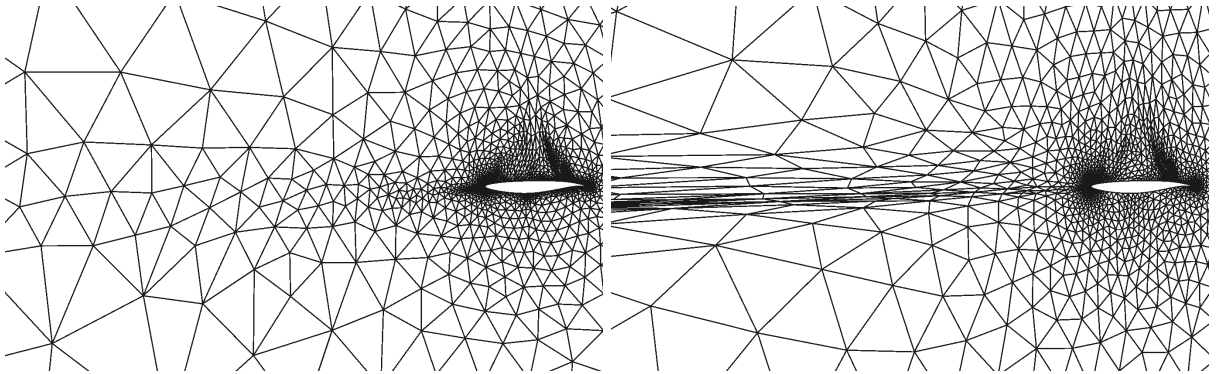


Figure 3: Meshes around the stagnation streamline, the left mesh is from cost-based Hessian adaptation, the right one is the MOESS adapted mesh.

Table 3: Computational cost comparison (inviscid, transonic). In cost-based optimization, the optimization tolerance is dynamically adjusted to be equal to the objective error estimate; the approximate values of the optimization tolerance in this table are from the last iteration on each fidelity.

	Optimization level	Optimization tol (Drag count)	CPU time (s)
Fixed-fidelity (coarse fixed mesh)	L3	0.020	5.243×10^4
Fixed-fidelity (fine fixed mesh)	L3	0.020	1.639×10^5
Variable-fidelity (error-based Hessian)	L1	2.000	7.880×10^2
	L2	0.200	7.153×10^3
Variable-fidelity (cost-based Hessian)	L3	0.020	3.668×10^4
	L1	≈ 1.329	2.149×10^3
	L2	$\delta J_m^{\text{adapt}} \approx 0.130$	8.241×10^3
Variable-fidelity (MOESS)	L3	≈ 0.015	2.113×10^4
	L1	≈ 0.822	2.334×10^3
	L2	$\delta J_m^{\text{adapt}} \approx 0.074$	5.550×10^3
	L3	≈ 0.007	1.630×10^4

The initial and optimized airfoils are compared in Figure 4, while the final objective values are collected in Table 4. The “true” objective values on both the initial and the final designs are also obtained via adapted meshes, with discretization error controlled to be small compared to the final optimization tolerance. All of the optimizations flatten the upper surface near the forward section, while curving and increasing the thickness at the lower surface. The curvature reduction on the top surface smooths the flow acceleration region to weaken the shock, while the thickened lower surface and curved aft section are required to maintain the lift and area constraints. Therefore, the strong shocks are significantly reduced at both operating conditions, as shown in the pressure distributions in Figure 4(a)–4(b). More detailed Mach number contour plots are given in Appendix B.1. In the optimization runs with adapted meshes, areas around the airfoil

leading and trailing edges are significantly refined, and many elements are dedicated to the shocks and the stagnation streamline. However, in the optimization with fixed meshes, elements are not efficiently distributed, and areas that are important for output predictions are not well-resolved, which as a result causes high objective error as seen in Figure 2(a). When the numerical error is too high, for example on the coarse fixed mesh, the optimization converges to a noticeably different design compared to the designs obtained from other optimizations, as shown in Figure 4(c). Thus the “true” objective value for the optimized design on the coarse fixed mesh is much higher compared to designs obtained on the other meshes. In the optimization with the fixed fine mesh, the discretization error is still high, but the optimization is able to converge to a similar design compared to designs produced by optimizations with discretization error control, as shown in Figure 4(c). Although the “true” objective value is also close to the objective values of our proposed methods with mesh adaptation (the difference among these methods is below or comparable to the optimization tolerance, which means that the optimization on these meshes converges correctly), the final objective value reported on the fixed mesh is far from accurate for practical design and the cost is extremely high compared to our proposed methods, which is observed in both Table 3 and Table 4. The proposed methods with mesh adaptation are able to obtain a reasonable design, and the associated error estimation is also accurate enough to provide confidence in the final design and computed output quantities.

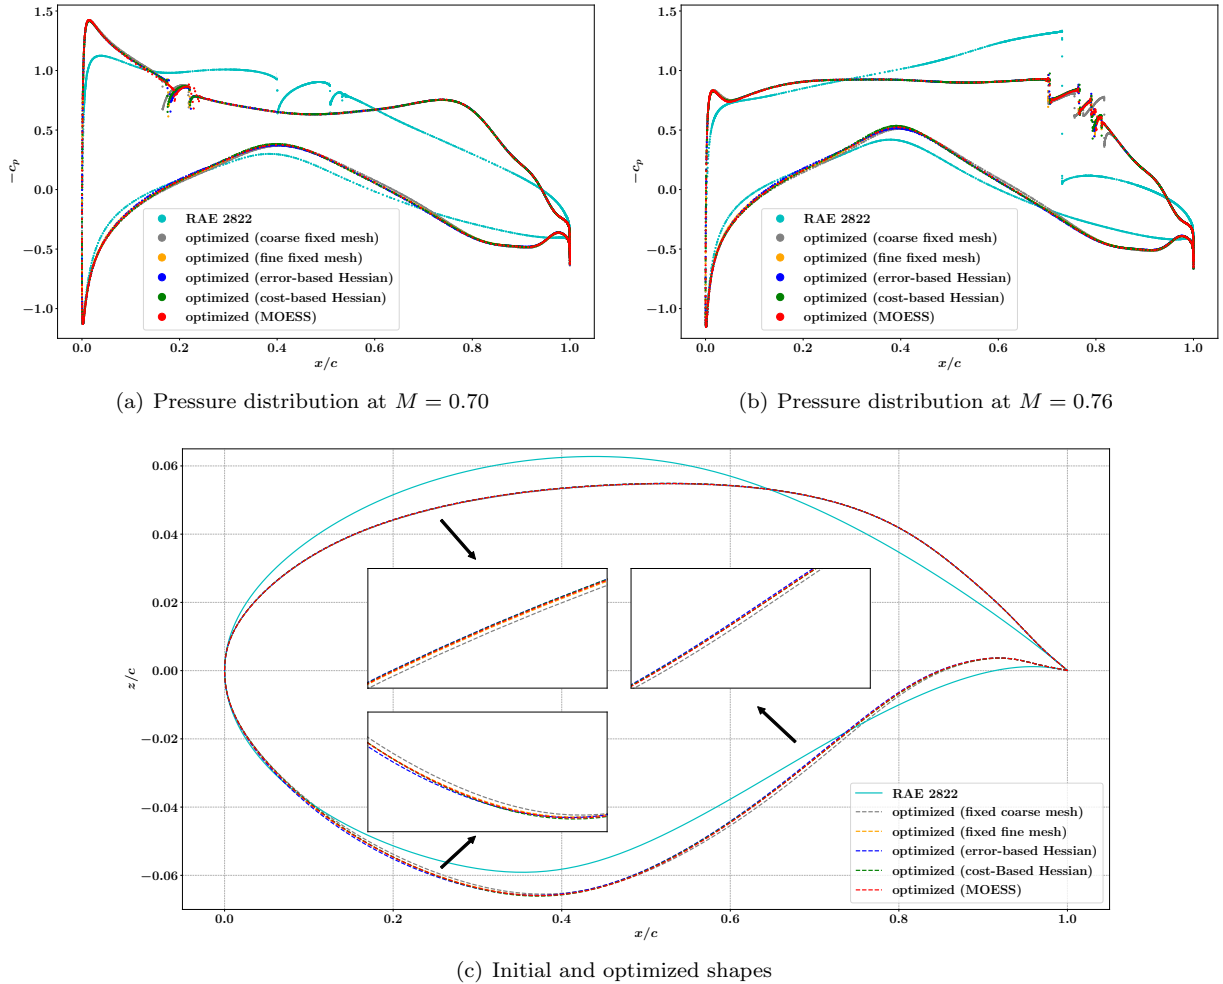


Figure 4: Pressure distribution for the initial and optimized designs (inviscid, transonic)

Table 4: Optimization results on different meshes (inviscid, transonic). The superscripts 0 and * refer to the initial and the optimized designs, respectively, while the “true” values are evaluated using adapted meshes that are much finer than the ones used in the optimization to serve as reference values.

	$(J_m^{\text{adapt}})^0$	$(J_m^{\text{adapt}})^*$	$(J_m^{\text{adapt}})^*$ (“true”)	Final mesh DOF
Fixed mesh (coarse)		$1.098 \times 10^{-4} \pm 6.778 \times 10^{-5}$	5.031×10^{-5}	56040
Fixed mesh (fine)		$5.366 \times 10^{-5} \pm 1.045 \times 10^{-5}$	4.389×10^{-5}	103716
Error-based Hessian	7.408×10^{-3}	$4.466 \times 10^{-5} \pm 1.311 \times 10^{-6}$	4.338×10^{-5}	66630
Cost-based Hessian		$4.513 \times 10^{-5} \pm 1.504 \times 10^{-6}$	4.383×10^{-5}	51324
MOESS		$4.333 \times 10^{-5} \pm 7.202 \times 10^{-7}$	4.278×10^{-5}	49116

7.2. Multipoint Turbulent Transonic Airfoil Optimization

Another problem considered in this paper is a more sophisticated fully-turbulent case. We set up a three-point optimization problem, analogous to minimizing the integrated drag coefficients over a range of Mach numbers at a fixed aircraft weight and altitude. The optimization again starts with the RAE 2822 airfoil, and seeks an optimal shape and angles of attack to minimize the composite drag coefficients with fixed lift constraints and non-decreasing airfoil area; the details of the case setup are given in Table 2.

For turbulent flow simulations at high Reynolds number, one of the key flow features is the thin boundary layer. Due to the linear velocity profile in the viscous sub-layer, Hessian-based mesh adaptation is usually inefficient since the Mach number Hessian is close to zero within this region. Therefore, only MOESS with cost-based variable-fidelity optimization is used in this case. For comparison, again, a fixed mesh is generated to initiate a fixed-fidelity optimization. The fixed optimization tolerance is set to be close to the final tolerance of the variable-fidelity optimization with adapted meshes. The fixed mesh is generated based on the final adapted meshes to achieve similar costs and near-wall resolution². The meshes used in the optimization are compared in Figure 5. At all the flight conditions considered, MOESS is able to effectively detect strong directional flow features and put highly-anisotropic elements around the airfoil boundary, at shock locations on the top surface, along the stagnation streamline and also near the wake region. In contrast, the fixed mesh only has refinements around the airfoil based on the *a priori* knowledge about the existence of boundary layers.

The objective and mesh size are collected at each optimization step as shown in Figure 6. In the convergence plot, we can see that the estimated composite objective errors are much larger than the optimization tolerance on the fixed mesh and can increase as the optimization proceeds. On the other hand, with mesh adaptation, the error estimates are well-controlled and remain close at the same fidelity even for different designs, as the total degrees of freedom are optimally distributed among different flight conditions, and the meshes are optimized individually at each of them. Instead of using the same fixed mesh for different design points, the proposed method consistently assigns higher degrees of freedom, *i.e.*, finer meshes, to the design point at Mach number of 0.73, which has a higher optimization weight compared to the other two flight conditions. As the optimization progresses, the meshes get refined and optimized, and more detailed design improvement is then made with smaller objective error and tighter optimization tolerance, *i.e.*, both the design and meshes converge to the optimum. The final optimization results on the fixed mesh and the adapted meshes are summarized in Table 5. The fixed mesh optimization converges to a design with a drag coefficient that is around 2 drag counts higher than the one obtained by the optimization with active mesh adaptation. Although the “exact” drag values are close on the final designs, the final drag value reported on the fixed mesh is far from accurate, not sufficient for use in practice.

Figures 7(a)–7(c) show the initial and final pressure distributions at each design point, while detailed Mach number contours can be found in Appendix B.2. The final airfoil shapes are compared in Figure 7(d). As in the inviscid case, optimizations on both the fixed mesh and the adapted meshes flatten the airfoil

²The fixed mesh is generated in order to achieve similar near-wall resolution as the optimized meshes, however, without an automatic way of generating highly-anisotropic elements, the manually-generated fixed mesh has more elements, *i.e.*, degrees of freedom, than the adapted meshes.

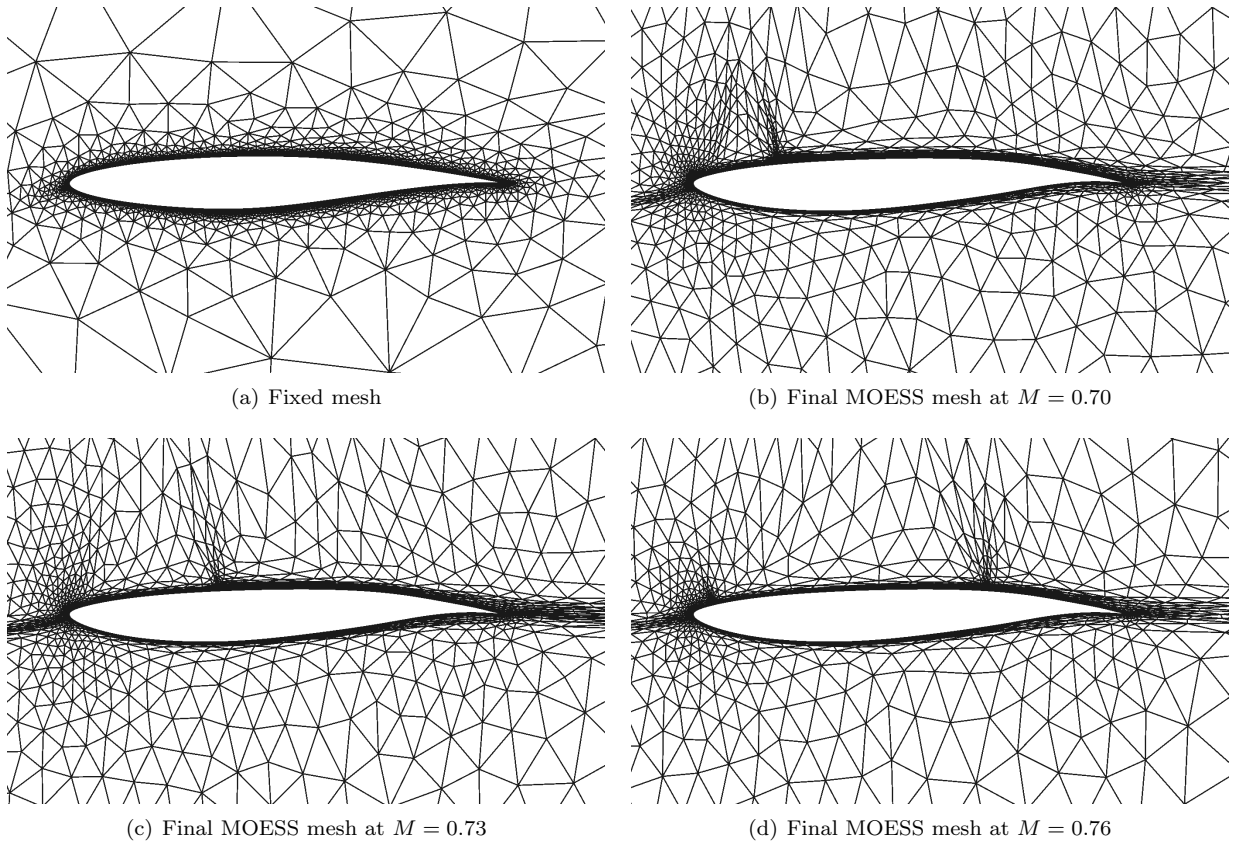


Figure 5: Meshes used during the optimization (turbulent, transonic). In the optimization with MOESS, the same initial coarse mesh, as shown in Figure 1(a), is used to start the optimization.

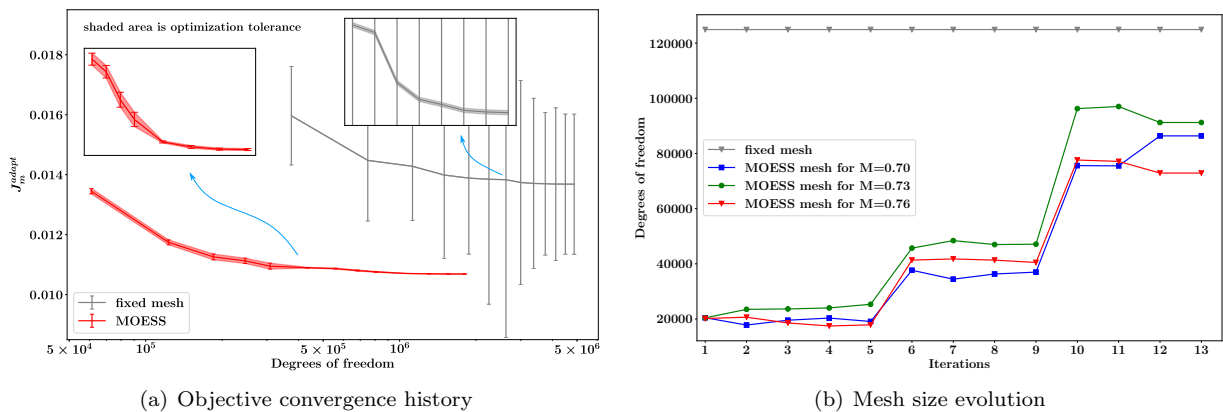


Figure 6: Convergence history and mesh size evolution for different methods (turbulent, transonic)

Table 5: Optimization results on different meshes (turbulent, transonic). The superscripts 0 and * refer to the initial and the optimized designs, respectively, while the “true” values are evaluated using adapted meshes that are much finer than the ones used in the optimization to serve as reference values.

	$(J_m^{\text{adapt}})^0$ (“true”)	$(J_m^{\text{adapt}})^*$	$(J_m^{\text{adapt}})^*$ (“true”)	Final mesh DOF
Fixed mesh	1.33466×10^{-2}	$1.36838 \times 10^{-2} \pm 2.3365 \times 10^{-3}$	1.09224×10^{-2}	374742
MOESS		$1.06912 \times 10^{-2} \pm 2.3231 \times 10^{-6}$	1.06925×10^{-2}	239998

upper surface, yet add more curvature at the lower surface to maintain the area constraint. The upper surfaces of the optimized airfoils from both the fixed mesh and the adapted meshes are very close, although the difference in the lower surfaces is evident. The optimization with the fixed mesh tries to increase the thickness around the middle of the airfoil, while the optimization with adapted meshes tends to thicken the fore section. Since the airfoil drag coefficient is less sensitive to the lower surface, accurate drag predictions are critical to capture the drag difference due to lower surface variations. With the high discretization errors in the objective values predicted on the fixed mesh, the detailed design modification on the lower surface is not optimal. Consequently, the final design on the fixed mesh tends to have a much stronger shock on the highest Mach number, *i.e.*, $M_\infty = 0.76$, though the shock strengths are similar at the lower Mach numbers. Therefore, the resulting drag of the optimized design on the fixed mesh is higher than the one given by the adapted meshes, which is also reflected in Table 5.

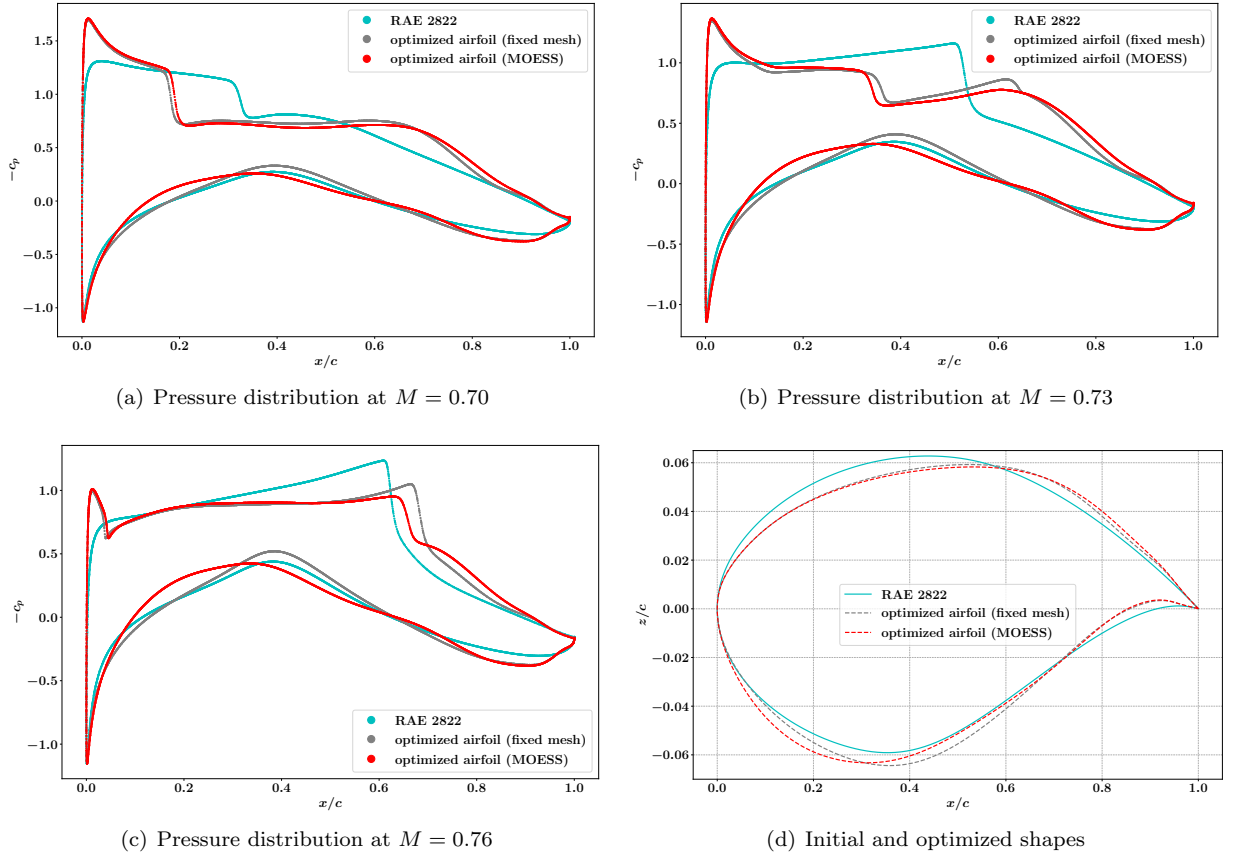


Figure 7: Pressure distribution for the initial and optimized designs (turbulent, transonic)

8. Conclusions

In practical aerodynamic design processes, the optimization problem has to be posed such that a range of operating conditions, including off-design points, are considered in the objective as well as the constraints. To ensure convergence to the “true” optimal design, the numerical error at each design point has to be carefully controlled. Rather than absolute output values, accurate incremental objective predictions, *e.g.*, drag difference between different designs, are of more importance in aerodynamic optimization and are less critical to computational meshes. Therefore, carefully generated *a priori* meshes are often able to yield decent designs, and this has also been found in the present work. However, as the flow conditions involved can vary dramatically, *a priori* meshes appropriate for all the design points can be hard to generate. Furthermore, the discretization error becomes more detrimental in detailed design or with high-fidelity requirements, for which *a priori* meshes are generally not sufficient.

In this work, we presented a variable-fidelity framework that integrates output-based error estimation and mesh adaptation with a gradient-based algorithm for multipoint aerodynamic shape optimization problems. The proposed framework can considerably facilitate the optimization setup and accelerate the design process. The designer only needs to input an initial mesh, which can be fairly coarse and easy to generate. The mesh adaptation (fidelity increase) is then tightly coupled with the optimization algorithm either with an error-based or a cost-based strategy. The variable-fidelity optimization framework driven by mesh adaptation is capable of preventing over-optimizing and over-refining, as shown in the test cases. Design optimization with mesh optimization via error sampling and synthesis (MOESS) is shown to be more efficient and effective by optimized computational cost distribution among various flight conditions and optimized meshes at each point. This benefit can become more significant when higher fidelity is required, or when more highly anisotropic physics govern the system.

With more judicious considerations of the objective functions and constraints, and additional parameters, the new method can provide realistic configurations in practical design scenarios. Also, the computational cost allocation adopted in this work still partially relies on *a priori* error-cost relations, which can be inefficient when inappropriate convergence rates are predicted/used. More appropriate error and cost models, such as *a posteriori* ones constructed during the optimization, can be developed to guide the cost distribution among different design points. Furthermore, only mesh adaptation (*h*-adaptation) is considered here to control the discretization error. More efficient adaptation mechanics, such as approximation order increment (*p*-adaptation), and combinations (*hp*-adaptation), can also be applied to the proposed methods in the future.

Acknowledgments

The authors acknowledge the support of the Boeing Company, with technical monitor Dr. Mori Mani, and the Department of Energy under grant DE-FG02-13ER26146/DE-SC0010341.

Appendix A. Trimming Algorithm

In the trimming process, given an active design \mathbf{x}_s , we want to satisfy the flow equation and the trim equation simultaneously, at each design point,

$$\begin{aligned} \mathbf{R} &= \begin{bmatrix} \mathbf{R}_1(\mathbf{U}_1, \mathbf{x}_t) \\ \vdots \\ \mathbf{R}_{N_m}(\mathbf{U}_{N_m}, \mathbf{x}_t) \end{bmatrix} = \mathbf{0}, \\ \mathbf{R}^{\text{trim}} &= \begin{bmatrix} \mathbf{J}_1^{\text{trim}}(\mathbf{U}_1, \mathbf{x}_t) - \bar{\mathbf{J}}_1^{\text{trim}} \\ \vdots \\ \mathbf{J}_{N_m}^{\text{trim}}(\mathbf{U}_{N_m}, \mathbf{x}_t) - \bar{\mathbf{J}}_{N_m}^{\text{trim}} \end{bmatrix} = \mathbf{0}. \end{aligned} \tag{A.1}$$

The Newton update of the system can be written as,

$$\begin{bmatrix} \frac{\partial \mathbf{R}_i}{\partial \mathbf{U}_i} & & & \frac{\partial \mathbf{R}_1}{\partial \mathbf{x}_t} \\ & \ddots & & \vdots \\ & & \frac{\partial \mathbf{R}_{N_m}}{\partial \mathbf{U}_{N_m}} & \frac{\partial \mathbf{R}_{N_m}}{\partial \mathbf{x}_t} \\ \hline \frac{\partial \mathbf{R}_1^{\text{trim}}}{\partial \mathbf{U}_1} & & & \frac{\partial \mathbf{R}_1^{\text{trim}}}{\partial \mathbf{x}_t} \\ & \ddots & & \vdots \\ & & \frac{\partial \mathbf{R}_i^{\text{trim}}}{\partial \mathbf{U}_i} & \frac{\partial \mathbf{R}_i^{\text{trim}}}{\partial \mathbf{x}_t} \end{bmatrix} \begin{bmatrix} \Delta \mathbf{U}_1 \\ \vdots \\ \Delta \mathbf{U}_{N_m} \\ \Delta \mathbf{x}_t \end{bmatrix} + \begin{bmatrix} \mathbf{R}_1 \\ \vdots \\ \mathbf{R}_{N_m} \\ \mathbf{R}^{\text{trim}} \end{bmatrix} = \mathbf{0}. \quad (\text{A.2})$$

We can first solve the upper block of the system to obtain $\Delta \mathbf{U}_i$, then substitute it back to the lower block to solve for $\Delta \mathbf{x}_t$, *i.e.*, solve the system via a Schur complement. The resulting equation for $\Delta \mathbf{x}_t$ is

$$\begin{aligned} & \left[\frac{\partial \mathbf{R}_i^{\text{trim}}}{\partial \mathbf{x}_t} - \frac{\partial \mathbf{R}_i^{\text{trim}}}{\partial \mathbf{U}_i} \left(\frac{\partial \mathbf{R}_i}{\partial \mathbf{U}_i} \right)^{-1} \frac{\partial \mathbf{R}_i}{\partial \mathbf{x}_t} \right] \Delta \mathbf{x}_t + \left[\mathbf{R}_i^{\text{trim}} - \frac{\partial \mathbf{R}_i^{\text{trim}}}{\partial \mathbf{U}_i} \left(\frac{\partial \mathbf{R}_i}{\partial \mathbf{U}_i} \right)^{-1} \mathbf{R}_i \right] = \mathbf{0}, \\ \Rightarrow & \left[\frac{\partial \mathbf{J}_i^{\text{trim}}}{\partial \mathbf{x}_t} - \frac{\partial \mathbf{J}_i^{\text{trim}}}{\partial \mathbf{U}_i} \left(\frac{\partial \mathbf{R}_i}{\partial \mathbf{U}_i} \right)^{-1} \frac{\partial \mathbf{R}_i}{\partial \mathbf{x}_t} \right] \Delta \mathbf{x}_t + \left[\mathbf{J}_i^{\text{trim}} - \bar{\mathbf{J}}_i^{\text{trim}} - \frac{\partial \mathbf{J}_i^{\text{trim}}}{\partial \mathbf{U}_i} \left(\frac{\partial \mathbf{R}_i}{\partial \mathbf{U}_i} \right)^{-1} \mathbf{R}_i \right] = \mathbf{0}, \\ & \Rightarrow \left[\frac{\partial \mathbf{J}_i^{\text{trim}}}{\partial \mathbf{x}_t} + (\tilde{\Psi}_i^{\text{trim}})^T \frac{\partial \mathbf{R}_i}{\partial \mathbf{x}_t} \right] \Delta \mathbf{x}_t + \left[\mathbf{J}_i^{\text{trim}} - \bar{\mathbf{J}}_i^{\text{trim}} + (\tilde{\Psi}_i^{\text{trim}})^T \mathbf{R}_i \right] = \mathbf{0}, \quad i = 1, \dots, N_m; \end{aligned} \quad (\text{A.3})$$

where $\tilde{\Psi}_i^{\text{trim}}$ has the same definition as the trim adjoint Ψ_i^{trim} , while the latter is evaluated at converged flow solutions, *i.e.*, when $\mathbf{R}_i = \mathbf{0}$. If $\Delta \mathbf{U}_i$ and $\Delta \mathbf{x}_t$ are updated simultaneously, the system requires concurrent adjoint solves for $\tilde{\Psi}_i^{\text{trim}}$, through which the flow solver module may need to be re-designed. Instead in this paper, we fix \mathbf{x}_t first and solve for \mathbf{U}_i to enforce the flow equations $\mathbf{R}_i = \mathbf{0}$, then update the trim variables using Eqn. A.3 which then simplifies to

$$\begin{aligned} & \left[\frac{\partial \mathbf{J}_i^{\text{trim}}}{\partial \mathbf{x}_t} + (\Psi_i^{\text{trim}})^T \frac{\partial \mathbf{R}_i}{\partial \mathbf{x}_t} \right] \Delta \mathbf{x}_t + [\mathbf{J}_i^{\text{trim}} - \bar{\mathbf{J}}_i^{\text{trim}}] = \mathbf{0}, \\ & \frac{d\mathbf{J}_i^{\text{trim}}}{d\mathbf{x}_t} \Delta \mathbf{x}_t + [\mathbf{J}_i^{\text{trim}} - \bar{\mathbf{J}}_i^{\text{trim}}] = \mathbf{0}, \quad i = 1, \dots, N_m; \\ \Rightarrow & \frac{d\mathbf{J}^{\text{trim}}}{d\mathbf{x}_t} \Delta \mathbf{x}_t + [\mathbf{J}^{\text{trim}} - \bar{\mathbf{J}}^{\text{trim}}] = \mathbf{0}, \end{aligned} \quad (\text{A.4})$$

where

$$\frac{d\mathbf{J}^{\text{trim}}}{d\mathbf{x}_t} = \begin{bmatrix} \frac{d\mathbf{J}_1^{\text{trim}}}{d\mathbf{x}_t} \\ \frac{d\mathbf{J}_2^{\text{trim}}}{d\mathbf{x}_t} \\ \vdots \\ \frac{d\mathbf{J}_{N_m}^{\text{trim}}}{d\mathbf{x}_t} \end{bmatrix}, \quad \mathbf{J}^{\text{trim}} - \bar{\mathbf{J}}^{\text{trim}} = \begin{bmatrix} \mathbf{J}_1^{\text{trim}} - \bar{\mathbf{J}}_1^{\text{trim}} \\ \mathbf{J}_2^{\text{trim}} - \bar{\mathbf{J}}_2^{\text{trim}} \\ \vdots \\ \mathbf{J}_{N_m}^{\text{trim}} - \bar{\mathbf{J}}_{N_m}^{\text{trim}} \end{bmatrix}. \quad (\text{A.5})$$

The process iterates until Eqn. A.1 is satisfied, as shown in Figure A.1. Although this approach is less efficient than solving \mathbf{x}_t and \mathbf{U}_i simultaneously, it requires minimal rewrites of the flow solver code. For the lift-constrained problem considered in this work, $\frac{d\mathbf{J}^{\text{trim}}}{d\mathbf{x}_t}$ is diagonal, *i.e.*, the trim constraints at each design point are decoupled and can be iterated independently.

The trimming process converges successfully most of the time when the sensitivity $\frac{d\mathbf{J}^{\text{trim}}}{d\mathbf{x}_t}$ is measured accurately, however, we do observe failures of the trimming process for some intermediate designs in the line search process, though these designs are never accepted as penalty is added if the lift constraint is not

satisfied. More detailed investigations on these airfoil shapes show non-uniqueness of the solution at the same flow condition. The resulting bifurcation of the trim outputs hinders the convergence of the trimming process, which has also been observed by other researchers [60, 61, 62]. In this paper, we restrict the maximum number of trimming iterations to exit the loop in Figure A.1 if the trimming fails. Improved treatment of such situations will be considered in future work.

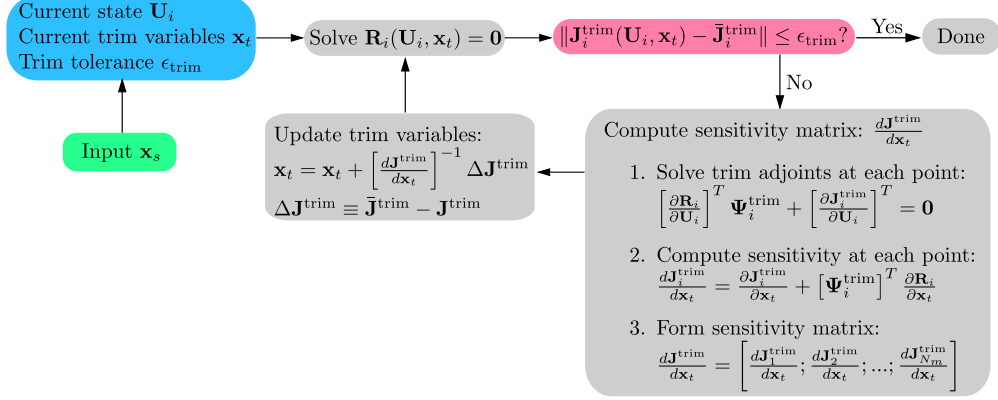


Figure A.1: Feedback trimming process

Appendix B. Further Comparisons of the Optimization Results

Appendix B.1. Inviscid Two-Point Optimization

To further compare the final designs obtained by different meshes for the inviscid two-point optimization case considered in Section 7.1, the Mach number contours at each design point are shown in Figure B.2 and Figure B.3. As we can see in Figure B.2, the final designs reduce the distance between the two original weak shocks and push them towards the leading edge. The final distance between the two weak shocks is a little larger in the design obtained from the fixed coarse mesh compared to the designs from other meshes, resulting in a higher drag in this flight condition. The shock location and strength are pretty much the same in the other designs. For the higher Mach number operating condition in Figure B.3, all of the final designs feature a complex shock structure near the trailing edge. The shock locations and the shock structures are all similar, except that an extra weak shock is present after the complex shock structure in the design from the fixed coarse mesh, again, resulting in a higher drag compared to other designs.

Appendix B.2. Turbulent Three-Point Optimization

Here, we compare the Mach number contours for the turbulent multipoint optimization case considered in Section 7.2. These are shown in Figure B.4–B.6. At a Mach number of 0.70, the shock strengths and shock locations for the optimized designs on both the fixed mesh and the adapted meshes are similar, which can also be read from Figure 7(a). For the design point with Mach number of 0.73, the optimized design on the fixed mesh features a weak shock near the trailing edge after the strong shock in the middle of the upper surface, while the design obtained on the adapted meshes only has one single shock. The major difference occurs for the flight condition at the highest Mach number, *i.e.*, $M_\infty = 0.76$, in which the fixed mesh obtained a design with a stronger shock that is closer to the trailing edge compared to the design on the adapted meshes.

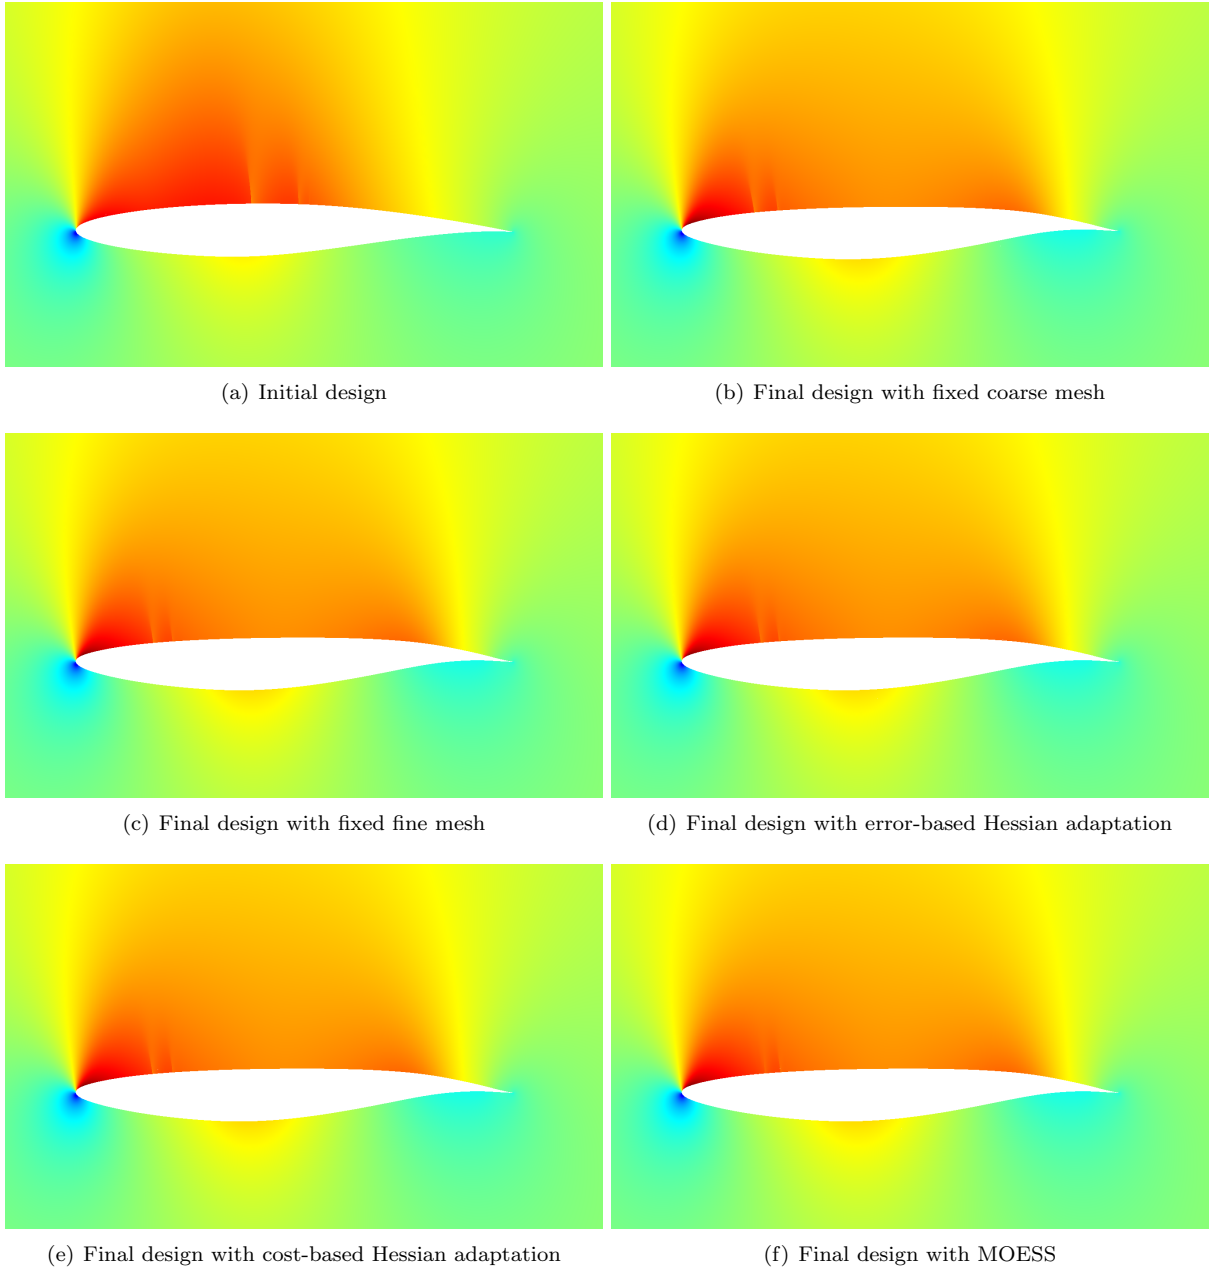


Figure B.2: Mach contour at $M_\infty = 0.70$ (inviscid) for the initial design and the final designs using different meshes (range 0 – 1.28)



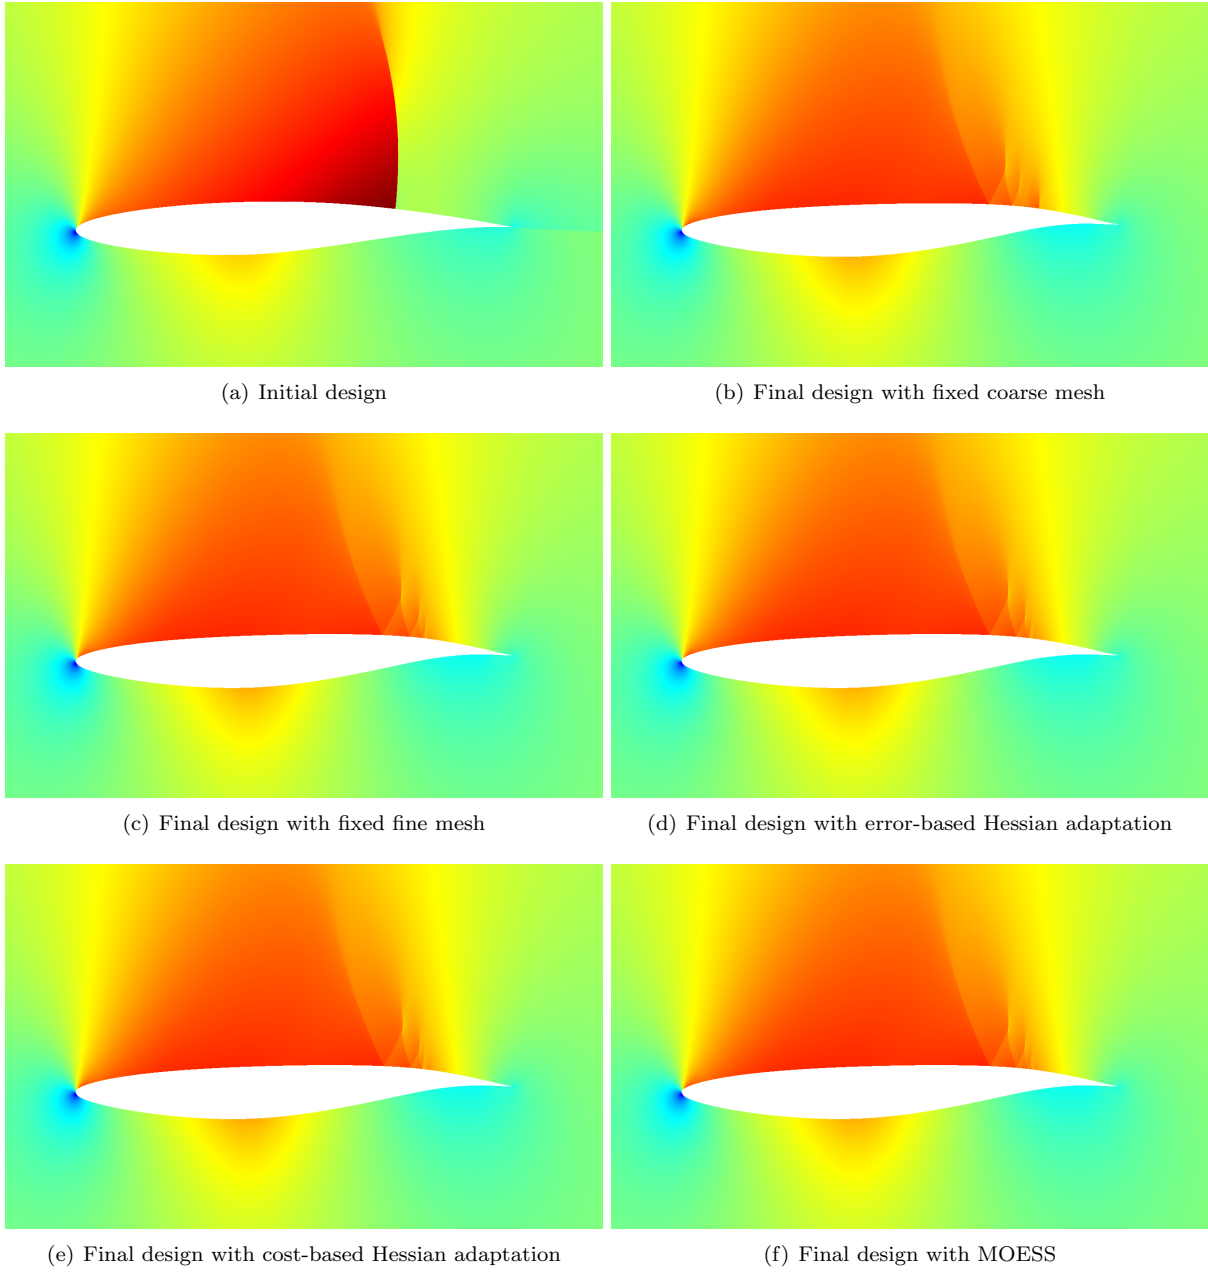



Figure B.3: Mach contour at $M_\infty = 0.76$ (inviscid) for the initial design and the final designs using different meshes (range 0 – 1.4)

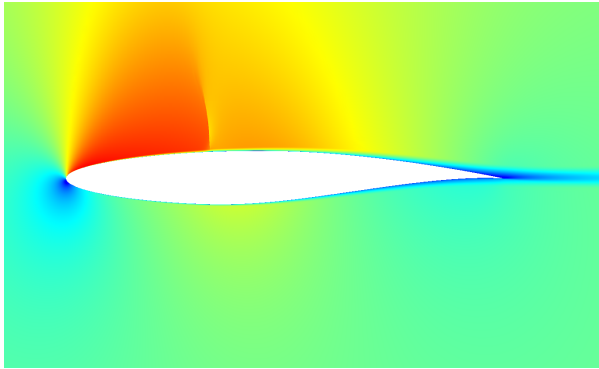

(a) Initial design

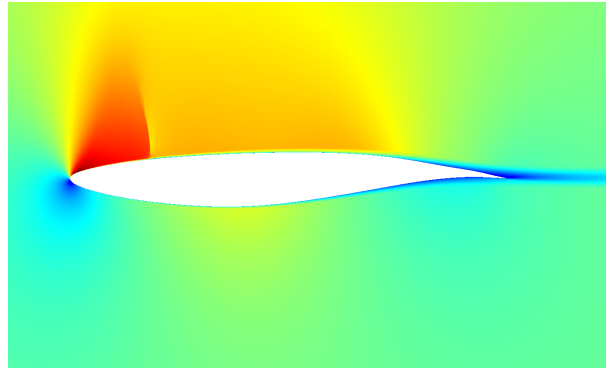


(b) Final deisgn with fixed mesh

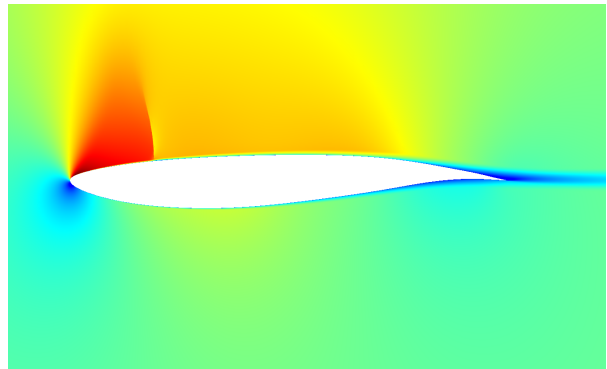


(c) Final design with MOESS


Figure B.4: Mach contour at $M_\infty = 0.70$ (turbulent) for the initial design and the final designs using different meshes (range 0 – 1.4)

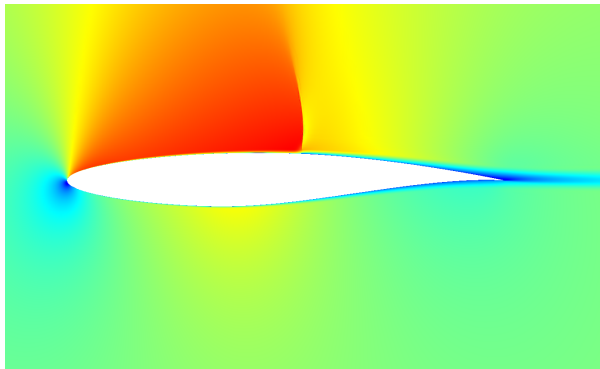

(a) Initial design

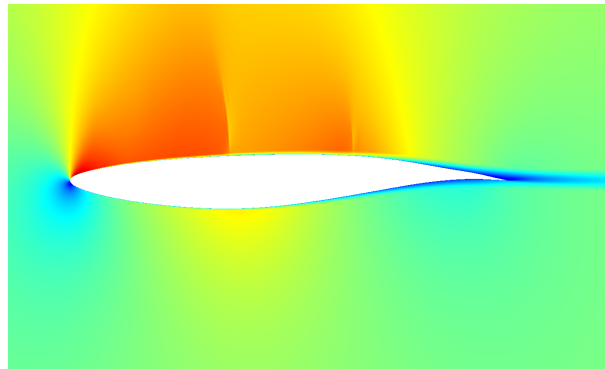


(b) Final deisgn with fixed mesh

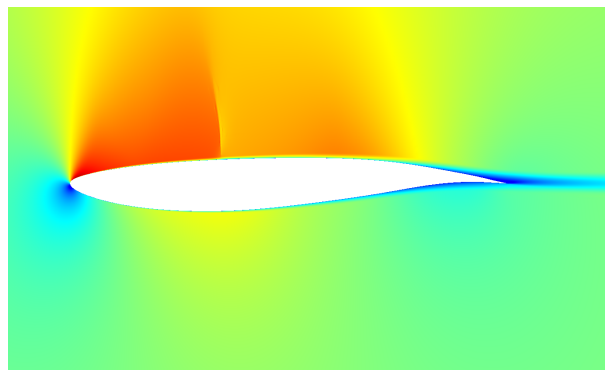


(c) Final design with MOESS


Figure B.5: Mach contour at $M_\infty = 0.73$ (turbulent) for the initial design and the final designs using different meshes (range 0 – 1.4)

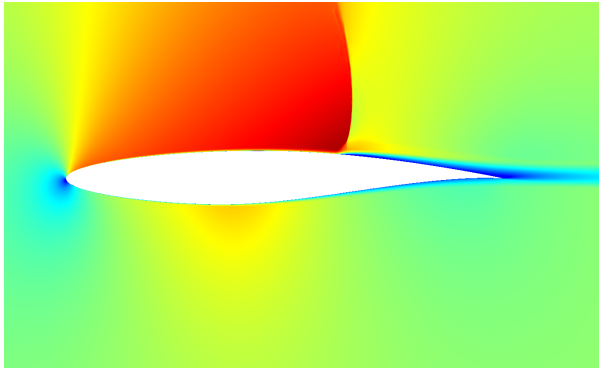

(a) Initial design

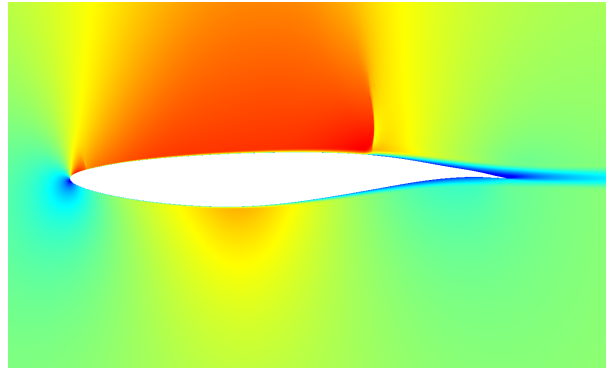

(b) Final deisgn with fixed mesh

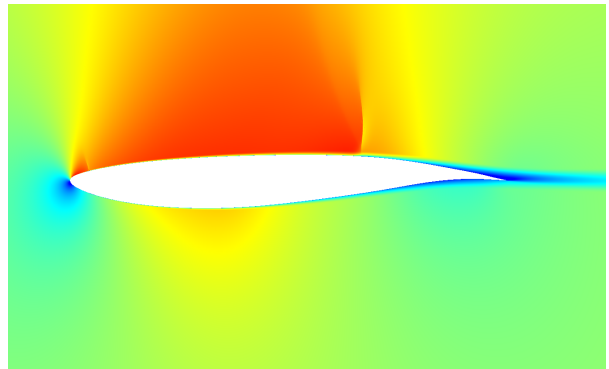

(c) Final design with MOESS

Figure B.6: Mach contour at $M_\infty = 0.76$ (turbulent) for the initial design and the final designs using different meshes (range 0 – 1.4)

References

- [1] P. Hajela, Nongradient methods in multidisciplinary design optimization-status and potential, *Journal of Aircraft* 36 (1) (1999) 255–265. doi:10.2514/2.2432.
- [2] D. W. Zingg, M. Nemec, T. H. Pulliam, A comparative evaluation of genetic and gradient-based algorithms applied to aerodynamic optimization, *European Journal of Computational Mechanics* 17 (1-2) (2008) 103–126. doi:10.3166/remn.17.103-126.
- [3] A. Jameson, Aerodynamic design via control theory, *Journal of Scientific Computing* 3 (3) (1988) 233–260. doi:10.1007/bf01061285.
- [4] W. Anderson, V. Venkatakrishnan, Aerodynamic design optimization on unstructured grids with a continuous adjoint formulation, *Computers & Fluids* 28 (4-5) (1999) 443–480. doi:10.1016/s0045-7930(98)00041-3.
- [5] M. B. Giles, N. A. Pierce, An introduction to the adjoint approach to design, *Flow, Turbulence and Combustion* 65 (3) (2000) 393–415. doi:10.1023/a:1011430410075.
- [6] J. J. Reuther, A. Jameson, J. J. Alonso, M. J. Rimlinger, D. Saunders, Constrained multipoint aerodynamic shape optimization using an adjoint formulation and parallel computers, part 1, *Journal of Aircraft* 36 (1) (1999) 51–60. doi:10.2514/2.2413.
- [7] E. J. Nielsen, W. K. Anderson, Aerodynamic design optimization on unstructured meshes using the navier-stokes equations, *AIAA Journal* 37 (11) (1999) 1411–1419. doi:10.2514/2.640.
- [8] S. Nadarajah, A. Jameson, A comparison of the continuous and discrete adjoint approach to automatic aerodynamic optimization, in: 38th Aerospace Sciences Meeting and Exhibit, American Institute of Aeronautics and Astronautics (AIAA), 2000. doi:10.2514/6.2000-667.
- [9] M. Nemec, D. W. Zingg, Newton-krylov algorithm for aerodynamic design using the navier-stokes equations, *AIAA Journal* 40 (6) (2002) 1146–1154. doi:10.2514/2.1764.
- [10] J. R. R. A. Martins, J. J. Alonso, J. J. Reuther, High-fidelity aerostructural design optimization of a supersonic business jet, *Journal of Aircraft* 41 (3) (2004) 523–530. doi:10.2514/1.11478.
- [11] M. Nemec, D. W. Zingg, T. H. Pulliam, Multipoint and multi-objective aerodynamic shape optimization, *AIAA Journal* 42 (6) (2004) 1057–1065. doi:10.2514/1.10415.
- [12] J. R. R. A. Martins, J. J. Alonso, J. J. Reuther, A coupled-adjoint sensitivity analysis method for high-fidelity aerostructural design, *Optimization and Engineering* 6 (1) (2005) 33–62. doi:10.1023/b:opte.0000048536.47956.62.
- [13] M. P. Rumpfkeil, D. W. Zingg, The optimal control of unsteady flows with a discrete adjoint method, *Optimization and Engineering* 11 (1) (2008) 5–22. doi:10.1007/s11081-008-9035-5.
- [14] J. E. Hicken, D. W. Zingg, Aerodynamic optimization algorithm with integrated geometry parameterization and mesh movement, *AIAA Journal* 48 (2) (2010) 400–413. doi:10.2514/1.44033.
- [15] T. M. Leung, D. W. Zingg, Aerodynamic shape optimization of wings using a parallel newton-krylov approach, *AIAA Journal* 50 (3) (2012) 540–550. doi:10.2514/1.j051192.
- [16] Z. Lyu, G. K. W. Kenway, J. R. R. A. Martins, Aerodynamic shape optimization investigations of the common research model wing benchmark, *AIAA Journal* 53 (4) (2015) 968–985. doi:10.2514/1.j053318.
- [17] L. Osusky, H. Buckley, T. Reist, D. W. Zingg, Drag minimization based on the navier-stokes equations using a newton-krylov approach, *AIAA Journal* 53 (6) (2015) 1555–1577. doi:10.2514/1.j053457.
- [18] D. W. Zingg, S. Elias, Aerodynamic optimization under a range of operating conditions, *AIAA Journal* 44 (11) (2006) 2787–2792. doi:10.2514/1.23658.
- [19] G. K. W. Kenway, J. R. R. A. Martins, Multipoint high-fidelity aerostructural optimization of a transport aircraft configuration, *Journal of Aircraft* 51 (1) (2014) 144–160. doi:10.2514/1.c032150.
- [20] G. K. W. Kenway, J. R. R. A. Martins, Multipoint aerodynamic shape optimization investigations of the common research model wing, *AIAA Journal* 54 (1) (2016) 113–128. doi:10.2514/1.j054154.
- [21] J. Ren, Aerodynamic shape optimization by multi-fidelity modeling and manifold mapping, Master’s thesis, Iowa State University, Ames, Iowa, USA (2016). doi:10.31274/etd-180810-4667.
- [22] J. E. Hicken, J. J. Alonso, PDE-constrained optimization with error estimation and control, *Journal of Computational Physics* 263 (2014) 136–150. doi:10.1016/j.jcp.2013.12.050.
- [23] G. Chen, K. J. Fidkowski, Discretization error control for constrained aerodynamic shape optimization, *Journal of Computational Physics* 387 (1) (2019) 163–185. doi:10.1016/j.jcp.2019.02.038.
- [24] R. Becker, R. Rannacher, An optimal control approach to a posteriori error estimation in finite element methods, *Acta Numerica* 10 (2001) 1–102. doi:10.1017/s0962492901000010.
- [25] R. Hartmann, P. Houston, Adaptive discontinuous Galerkin finite element methods for the compressible Euler equations, *Journal of Computational Physics* 183 (2) (2002) 508–532. doi:10.1006/jcph.2002.7206.
- [26] D. A. Venditti, D. L. Darmofal, Anisotropic grid adaptation for functional outputs: application to two-dimensional viscous flows, *Journal of Computational Physics* 187 (1) (2003) 22–46. doi:10.1016/s0021-9991(03)00074-3.
- [27] M. A. Park, Adjoint-based, three-dimensional error prediction and grid adaptation, *AIAA Journal* 42 (9) (2004) 1854–1862. doi:10.2514/1.10051.
- [28] K. J. Fidkowski, D. L. Darmofal, Review of output-based error estimation and mesh adaptation in computational fluid dynamics, *AIAA Journal* 49 (4) (2011) 673–694. doi:10.2514/1.j050073.
- [29] K. J. Fidkowski, Output-based space-time mesh optimization for unsteady flows using continuous-in-time adjoints, *Journal of Computational Physics* 341 (2017) 258–277. doi:10.1016/j.jcp.2017.04.005.
- [30] M. Kouhi, E. Oñate, D. Mavriplis, Adjoint-based adaptive finite element method for the compressible Euler equations using finite calculus, *Aerospace Science and Technology* 46 (2015) 422–435. doi:10.1016/j.ast.2015.08.008.

- [31] G. L. Halila, G. Chen, Y. Shi, K. J. Fidkowski, J. R. Martins, M. T. de Mendonça, High-reynolds number transitional flow simulation via parabolized stability equations with an adaptive RANS solver, *Aerospace Science and Technology* 91 (1) (2019) 321–336. doi:10.1016/j.ast.2019.05.018.
- [32] J. Lu, An a posteriori error control framework for adaptive precision optimization using discontinuous Galerkin finite element method, Ph.D. thesis, Massachusetts Institute of Technology, Cambridge, Massachusetts, USA, available: <http://hdl.handle.net/1721.1/34134> (2005).
- [33] M. Nemec, M. Aftosmis, Output error estimates and mesh refinement in aerodynamic shape optimization, in: 51st AIAA Aerospace Sciences Meeting including the New Horizons Forum and Aerospace Exposition, American Institute of Aeronautics and Astronautics, 2013, p. 0865. doi:10.2514/6.2013-865.
- [34] D. Li, R. Hartmann, Adjoint-based airfoil optimization with discretization error control, *International Journal for Numerical Methods in Fluids* 77 (1) (2015) 1–17. doi:10.1002/flid.3971.
- [35] G. R. Anderson, M. Nemec, M. J. Aftosmis, Aerodynamic shape optimization benchmarks with error control and automatic parameterization, in: 53rd AIAA Aerospace Sciences Meeting, American Institute of Aeronautics and Astronautics, 2015, p. 1719. doi:10.2514/6.2015-1719.
- [36] G. Chen, K. J. Fidkowski, Airfoil shape optimization using output-based adapted meshes, in: 23rd AIAA Computational Fluid Dynamics Conference, American Institute of Aeronautics and Astronautics, 2017, p. 3102. doi:10.2514/6.2017-3102.
- [37] K. Wang, S. Yu, Z. Wang, R. Feng, T. Liu, Adjoint-based airfoil optimization with adaptive isogeometric discontinuous Galerkin method, *Computer Methods in Applied Mechanics and Engineering* 344 (2019) 602–625. doi:10.1016/j.cma.2018.10.033.
- [38] M. Nemec, D. L. Rodriguez, M. J. Aftosmis, Adjoint-based mesh adaptation and shape optimization for simulations with propulsion, in: AIAA Aviation 2019 Forum, American Institute of Aeronautics and Astronautics, 2019, p. 3488. doi:10.2514/6.2019-3488.
- [39] B. A. Rothacker, M. Ceze, K. Fidkowski, Adjoint-based error estimation and mesh adaptation for problems with output constraints, in: 32nd AIAA Applied Aerodynamics Conference, American Institute of Aeronautics and Astronautics, 2014, p. 2576. doi:10.2514/6.2014-2576.
- [40] S. Boyd, L. Vandenberghe, *Convex Optimization*, Cambridge University Press, 2004. doi:10.1017/cbo9780511804441.
- [41] S. Allmaras, F. Johnson, P. Spalart, Modifications and clarifications for the implementation of the Spalart-Allmaras turbulence model, Seventh International Conference on Computational Fluid Dynamics (ICCFD7) 1902 (2012).
- [42] W. Reed, T. Hill, Triangular mesh methods for the neutron transport equation, Tech. rep., Los Alamos Scientific Lab, available: <https://www.osti.gov/servlets/purl/4491151> (October 1973).
- [43] F. Bassi, S. Rebay, A high-order accurate discontinuous finite element method for the numerical solution of the compressible Navier–Stokes equations, *Journal of Computational Physics* 131 (2) (1997) 267–279. doi:10.1006/jcph.1996.5572.
- [44] B. Cockburn, C.-W. Shu, Runge–kutta discontinuous Galerkin methods for convection-dominated problems, *Journal of Scientific Computing* 16 (3) (2001) 173–261. doi:10.1023/a:1012873910884.
- [45] R. Hartmann, J. Held, T. Leicht, F. Prill, Discontinuous Galerkin methods for computational aerodynamics — 3D adaptive flow simulation with the DLR PADGE code, *Aerospace Science and Technology* 14 (7) (2010) 512–519. doi:10.1016/j.ast.2010.04.002.
- [46] P. Roe, Approximate Riemann solvers, parameter vectors, and difference schemes, *Journal of Computational Physics* 43 (2) (1981) 357–372. doi:10.1016/0021-9991(81)90128-5.
- [47] F. Bassi, S. Rebay, GMRES discontinuous Galerkin solution of the compressible Navier–Stokes equations, in: *Lecture Notes in Computational Science and Engineering*, Springer Berlin Heidelberg, 2000, pp. 197–208. doi:10.1007/978-3-642-59721-3_14.
- [48] M. Yano, An optimization framework for adaptive higher-order discretizations of partial differential equations on anisotropic simplex meshes, Ph.D. thesis, Massachusetts Institute of Technology, Cambridge, Massachusetts, USA, available: <http://hdl.handle.net/1721.1/76090>, (2012).
- [49] M. Yano, D. L. Darmofal, An optimization-based framework for anisotropic simplex mesh adaptation, *Journal of Computational Physics* 231 (22) (2012) 7626–7649. doi:10.1016/j.jcp.2012.06.040.
- [50] K. Fidkowski, A local sampling approach to anisotropic metric-based mesh optimization, in: 54th AIAA Aerospace Sciences Meeting, American Institute of Aeronautics and Astronautics, 2016, p. 0835. doi:10.2514/6.2016-0835.
- [51] R. M. Hicks, P. A. Henne, Wing design by numerical optimization, *Journal of Aircraft* 15 (7) (1978) 407–412. doi:10.2514/3.58379.
- [52] H.-Y. Wu, S. Yang, F. Liu, H.-M. Tsai, Comparisons of three geometric representations of airfoils for aerodynamic optimization, in: 16th AIAA Computational Fluid Dynamics Conference, American Institute of Aeronautics and Astronautics, 2003, p. 4095. doi:10.2514/6.2003-4095.
- [53] E. Luke, E. Collins, E. Blades, A fast mesh deformation method using explicit interpolation, *Journal of Computational Physics* 231 (2) (2012) 586–601. doi:10.1016/j.jcp.2011.09.021.
- [54] D. Kraft, A software package for sequential quadratic programming, Tech. Rep. DFVLR-FB 88-28, DLR German Aerospace Center–Institute for Flight Mechanics, Köln, Germany (1988).
- [55] K. J. Fidkowski, T. A. Oliver, J. Lu, D. L. Darmofal, p-multigrid solution of high-order discontinuous galerkin discretizations of the compressible navier–stokes equations, *Journal of Computational Physics* 207 (1) (2005) 92–113. doi:10.1016/j.jcp.2005.01.005.
- [56] Z. Wang, K. Fidkowski, R. Abgrall, F. Bassi, D. Caraeni, A. Cary, H. Deconinck, R. Hartmann, K. Hillewaert, H. Huynh, N. Kroll, G. May, P.-O. Persson, B. van Leer, M. Visbal, High-order CFD methods: current status and perspective, *International Journal for Numerical Methods in Fluids* 72 (8) (2013) 811–845. doi:10.1002/flid.3767.

- [57] K. J. Fidkowski, M. A. Ceze, P. L. Roe, Entropy-based drag-error estimation and mesh adaptation in two dimensions, *Journal of Aircraft* 49 (5) (2012) 1485–1496. doi:10.2514/1.c031795.
- [58] M. Ceze, K. J. Fidkowski, Drag prediction using adaptive discontinuous finite elements, *Journal of Aircraft* 51 (4) (2014) 1284–1294. doi:10.2514/1.c032622.
- [59] K. Fidkowski, Three-dimensional benchmark RANS computations using discontinuous finite elements on solution-adapted meshes, in: 2018 AIAA Aerospace Sciences Meeting, American Institute of Aeronautics and Astronautics, 2018, p. 1104. doi:10.2514/6.2018-1104.
- [60] A. Jameson, Airfoils admitting non-unique solutions of the Euler equations, in: 22nd Fluid Dynamics, Plasma Dynamics and Lasers Conference, American Institute of Aeronautics and Astronautics, 1991. doi:10.2514/6.1991-1625.
- [61] M. M. Hafez, W. H. Guo, Nonuniqueness of transonic flows, *Acta Mechanica* 138 (3-4) (1999) 177–184. doi:10.1007/bf01291843.
- [62] A. Kuzmin, Non-unique transonic flows over airfoils, *Computers & Fluids* 63 (2012) 1–8. doi:10.1016/j.compfluid.2012.04.001.